



US007488254B2

(12) **United States Patent**
Himoto et al.

(10) **Patent No.:** **US 7,488,254 B2**
(45) **Date of Patent:** **Feb. 10, 2009**

(54) **CONTROLLER AND EXPANSION UNIT FOR CONTROLLER**

(75) Inventors: **Atsunori Himoto**, Tokyo (JP); **Kenji Tosaki**, Tokyo (JP); **Toshinori Date**, Tokyo (JP)

(73) Assignee: **SEGA Enterprises, Ltd.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 574 days.

(21) Appl. No.: **11/151,214**

(22) Filed: **Jun. 14, 2005**

(65) **Prior Publication Data**

US 2005/0233808 A1 Oct. 20, 2005

Related U.S. Application Data

(62) Division of application No. 10/106,022, filed on Mar. 27, 2002, now Pat. No. 7,081,051, which is a division of application No. 08/952,312, filed on Feb. 27, 1998, now abandoned.

(51) **Int. Cl.**

A63F 9/24 (2006.01)

A63F 13/00 (2006.01)

G06F 17/00 (2006.01)

G06F 19/00 (2006.01)

(52) **U.S. Cl.** **463/37**; 200/5; 200/6; 345/156; 345/168; 345/169; 273/148 R

(58) **Field of Classification Search** **463/37**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,469,330 A 9/1984 Asher

4,552,360 A 11/1985 Bromley et al.

5,207,426 A 5/1993 Inoue et al.

5,232,223 A 8/1993 Dornbusch

5,296,871 A 3/1994 Paley

5,451,053 A 9/1995 Garrido

5,551,693 A 9/1996 Goto et al.

5,644,113 A 7/1997 Date et al.

5,684,722 A 11/1997 Thorner et al.

5,820,462 A 10/1998 Yokoi et al.

6,022,274 A 2/2000 Takeda et al.

6,186,896 B1 * 2/2001 Takeda et al. 463/38

6,231,444 B1 * 5/2001 Goto et al. 463/37

FOREIGN PATENT DOCUMENTS

JP 07-200162 8/1995

OTHER PUBLICATIONS

Patent Abstracts of Japan, Kkai No. 7-204345*, Aug. 8, 1995.

* cited by examiner

Primary Examiner—Robert E Pezzuto

Assistant Examiner—Paul A. D'Agostino

(74) *Attorney, Agent, or Firm*—Dickstein Shapiro, LLP.

(57) **ABSTRACT**

An expansion unit **50**, **60** or **70** is connected to a controller body **10** including an analog direction key **12**, a digital direction key **14**, command buttons **20a-20z**, command levers **22l**, **22r**, etc. An expansion unit **50** including a photo emitting unit **52** is connected to thereby make the controller cordless. An expansion unit **60** including a photo detecting unit **65**, whereby shooting games in which an enemy on a monitor screen can be shot can be played. An expansion unit **70** including a vibration unit **75** is connected, whereby a vibration is given to the controller body **10** to make a shooting game more realistic. New functions can be added to the conventional controller, and the new functions can be added freely without making no change to the controller body.

13 Claims, 36 Drawing Sheets

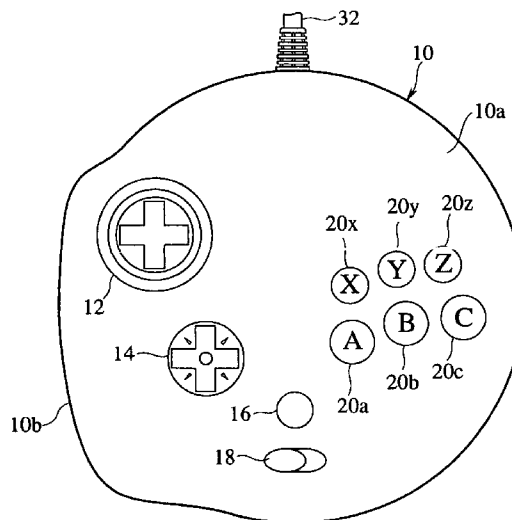


FIG. 1

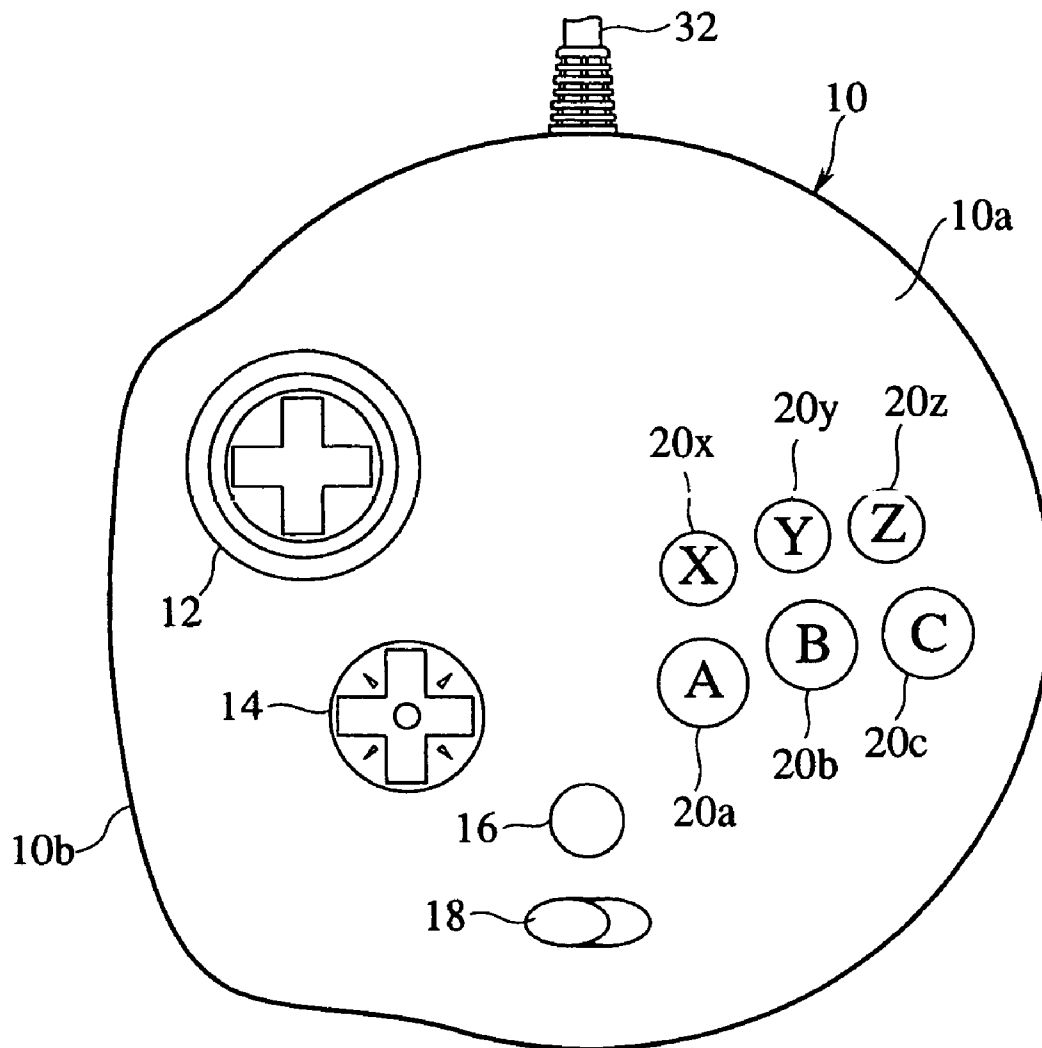


FIG. 2

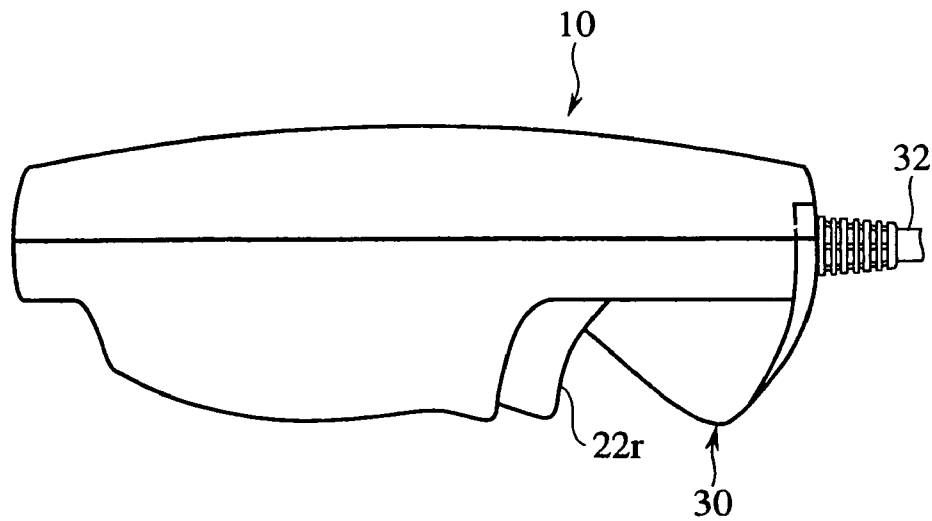


FIG. 3

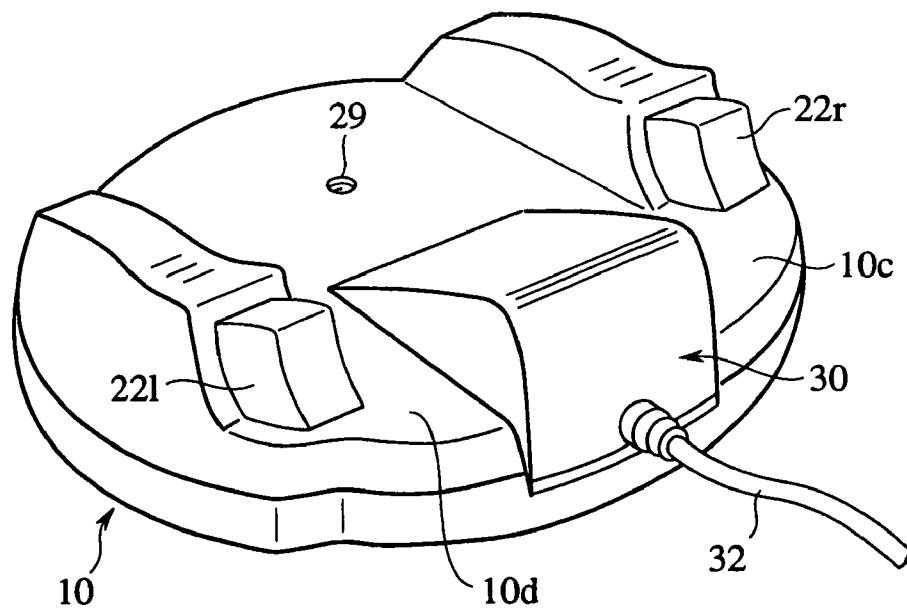


FIG. 4

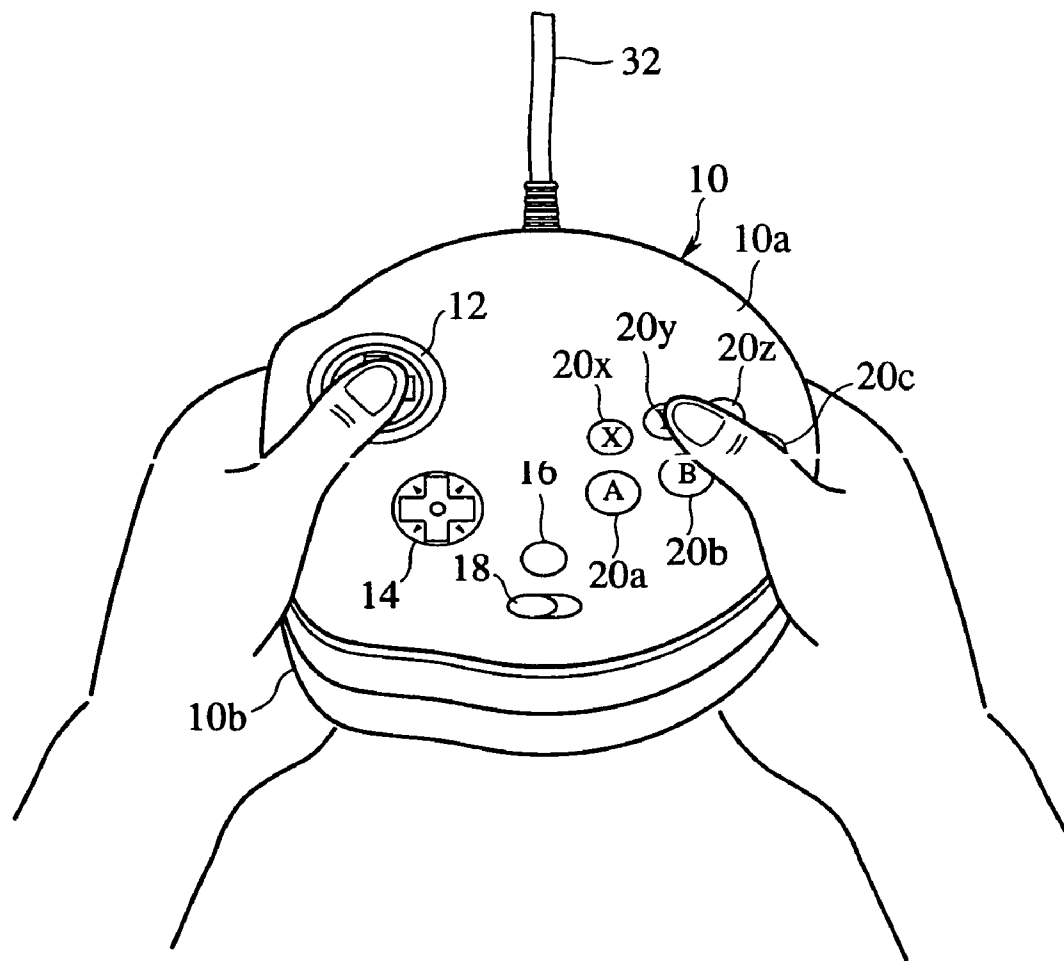


FIG. 5

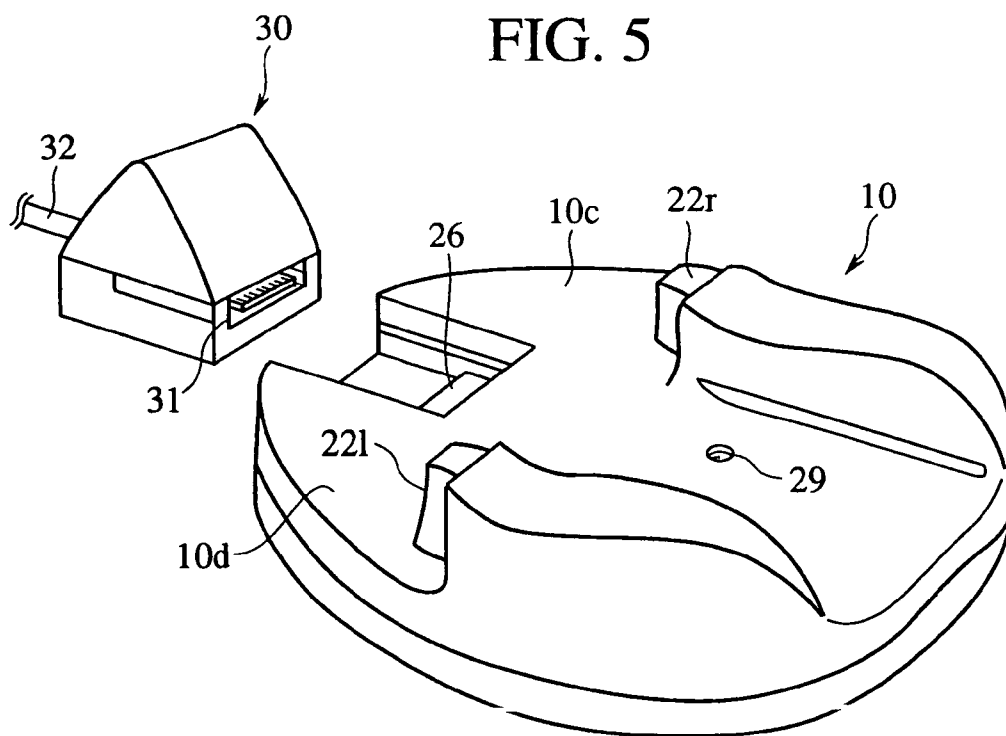


FIG. 6A

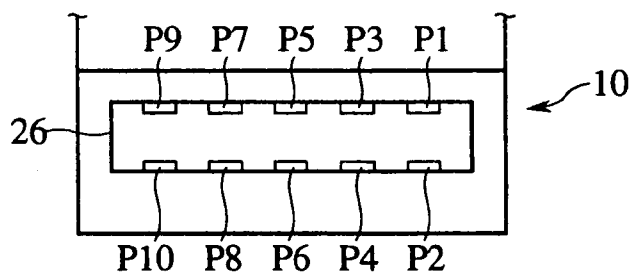
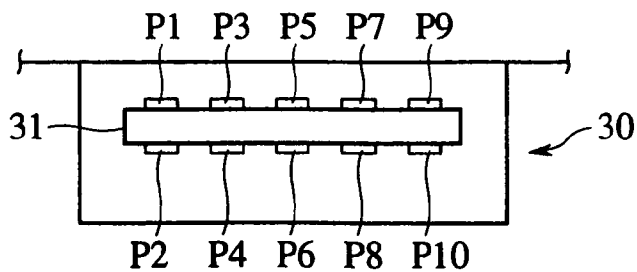
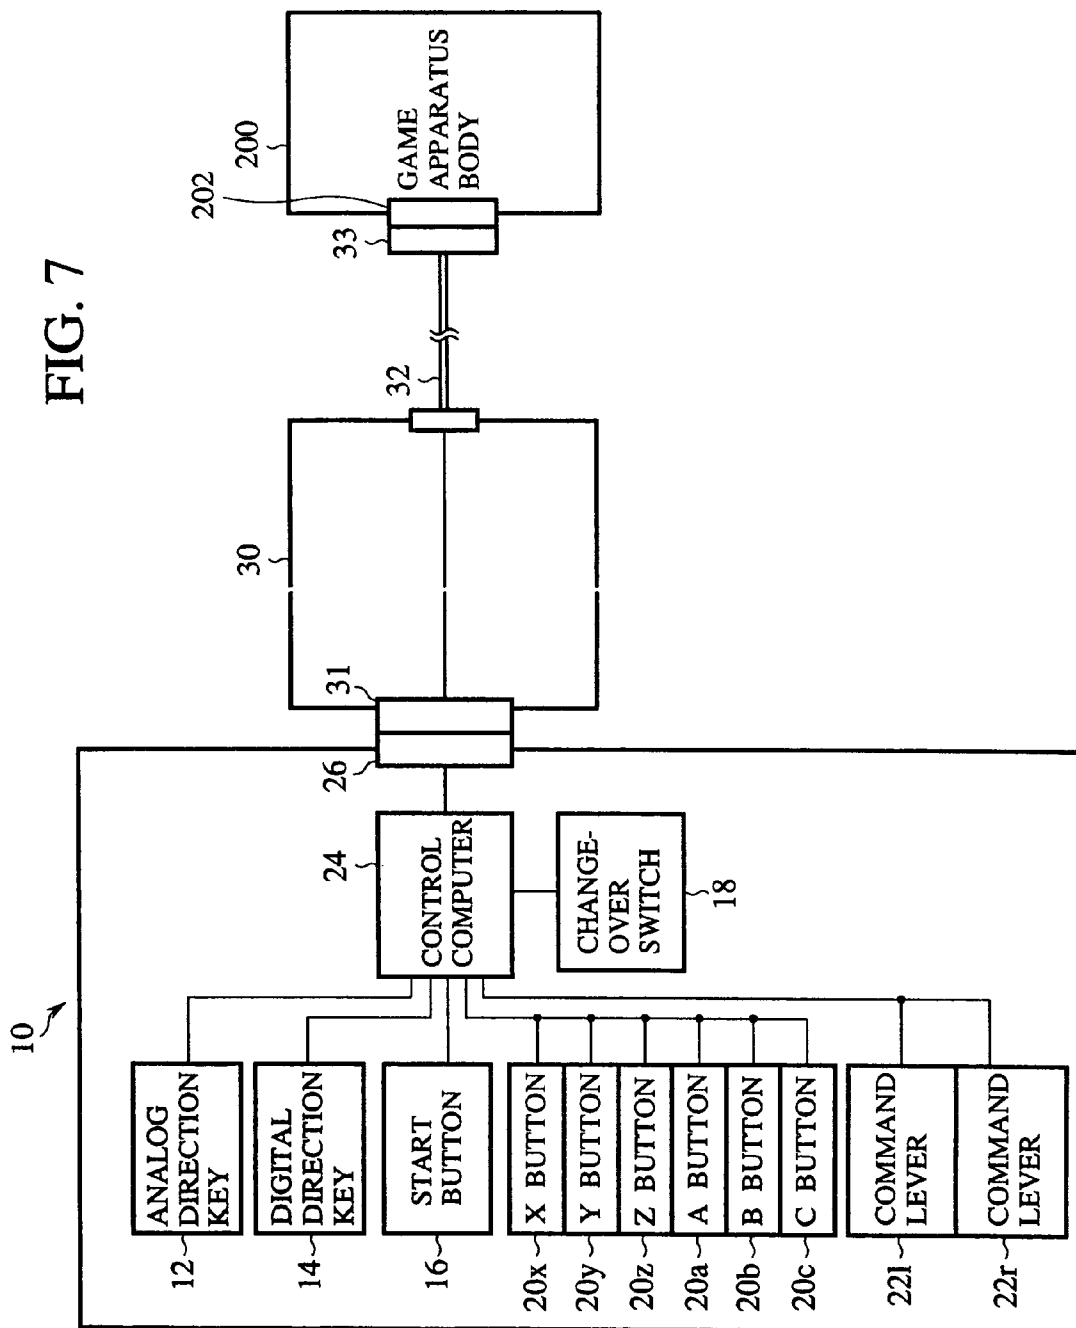


FIG. 6B





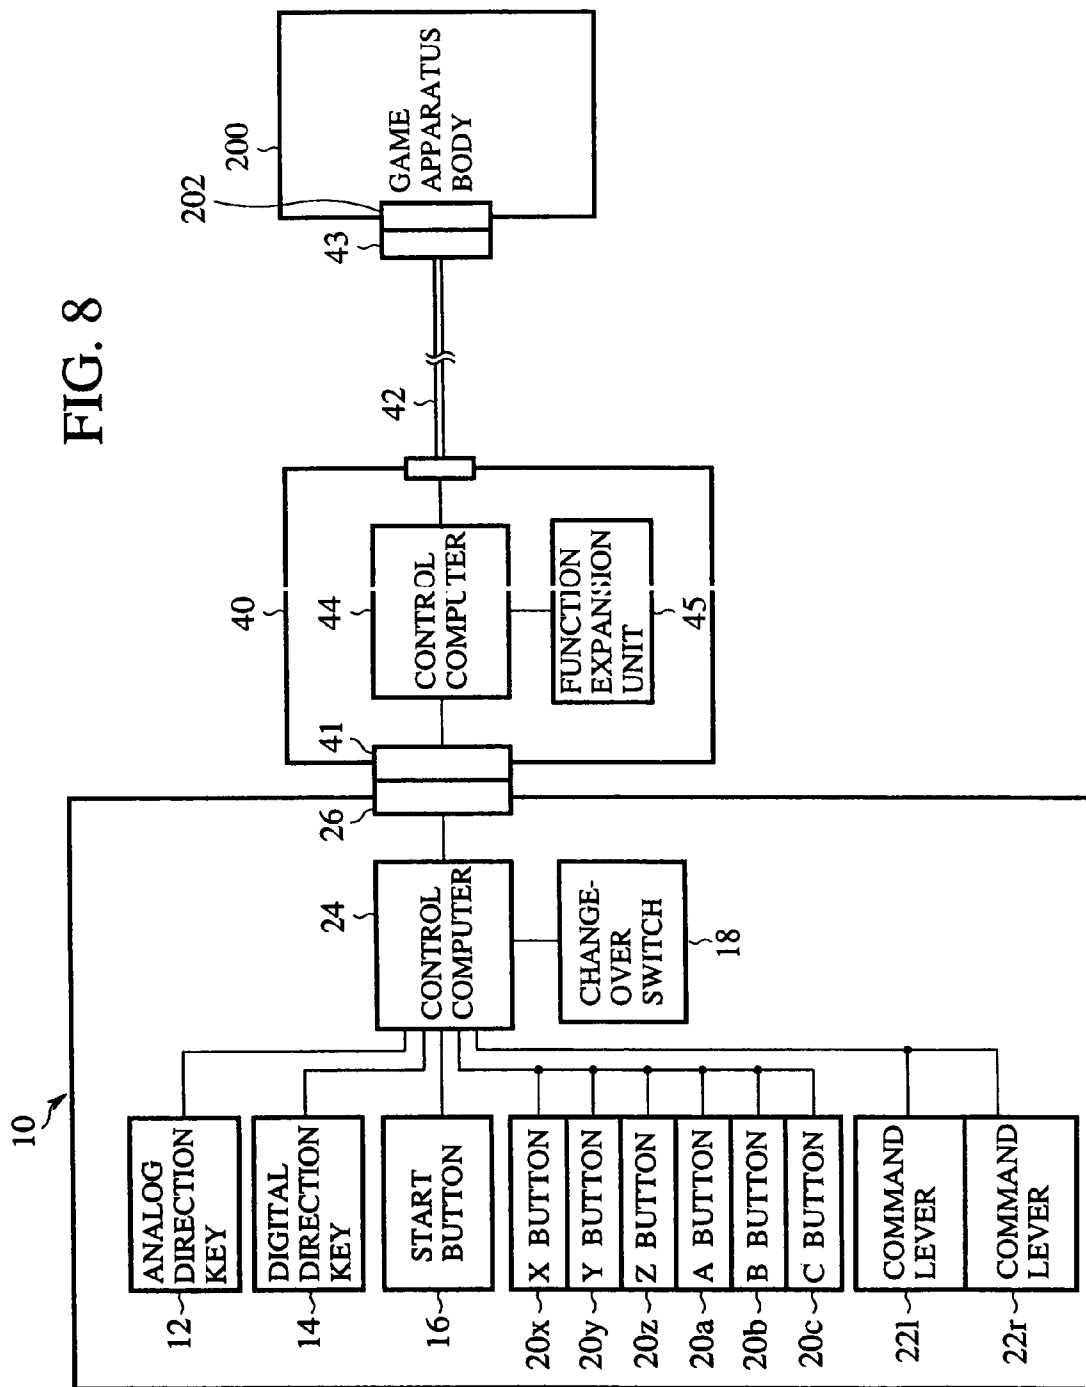


FIG. 9A

PIN ARRANGEMENT OF EXPANSION UNIT 26
FOR CONTROLLER BODY 10

SIGNAL NAME	PIN NO.	CONTENTS
TH	P4	MAINLY CONTROL LINE (SELECT) FROM EXPANSION UNIT
TR	P5	MAINLY CONTROL LINE (REQUEST) FROM EXPANSION UNIT
TL	P6	MAINLY CONTROL LINE (RESPONSE) TO EXPANSION UNIT
R	P7	MAINLY DATA LINE (3 BITS)
L	P8	MAINLY DATA LINE (2 BITS)
D	P2	MAINLY DATA LINE (1BIT)
U	P3	MAINLY DATA LINE (0 BIT)
VCC	P1	ELECTRIC POWER SOURCE (+5V)
GND	P9	GND

FIG. 9B

PIN ARRANGEMENT OF CONNECTOR 41
FOR EXPANSION UNIT 40

SIGNAL NAME	PIN NO.	CONTENTS
TH	P4	MAINLY CONTROL LINE (SELECT) TO CONTROLLER
TR	P5	MAINLY CONTROL LINE (REQUEST) TO CONTROLLER
TL	P6	MAINLY CONTROL LINE (RESPONSE) FROM CONTROLLER
R	P7	MAINLY DATA LINE (3 BITS)
L	P8	MAINLY DATA LINE (2 BITS)
D	P2	MAINLY DATA LINE (1BIT)
U	P3	MAINLY DATA LINE (0 BIT)
VCC	P1	ELECTRIC POWER SOURCE (+5V)
GND	P9	GND

FIG. 10A

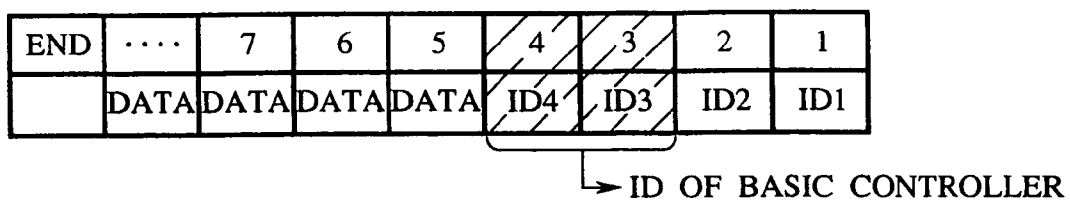


FIG. 10B

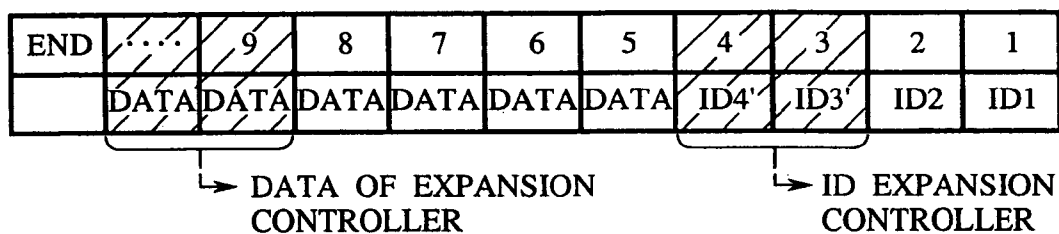


FIG. 10C

END	8	7	6	5	4	3	2	1
0	F	F	F	F	4	1	1	1

FIG. 10D

END	10	9	8	7	6	5	4	3	2	1
0	8	8	F	F	F	F	6	6	1	1

FIG. 11

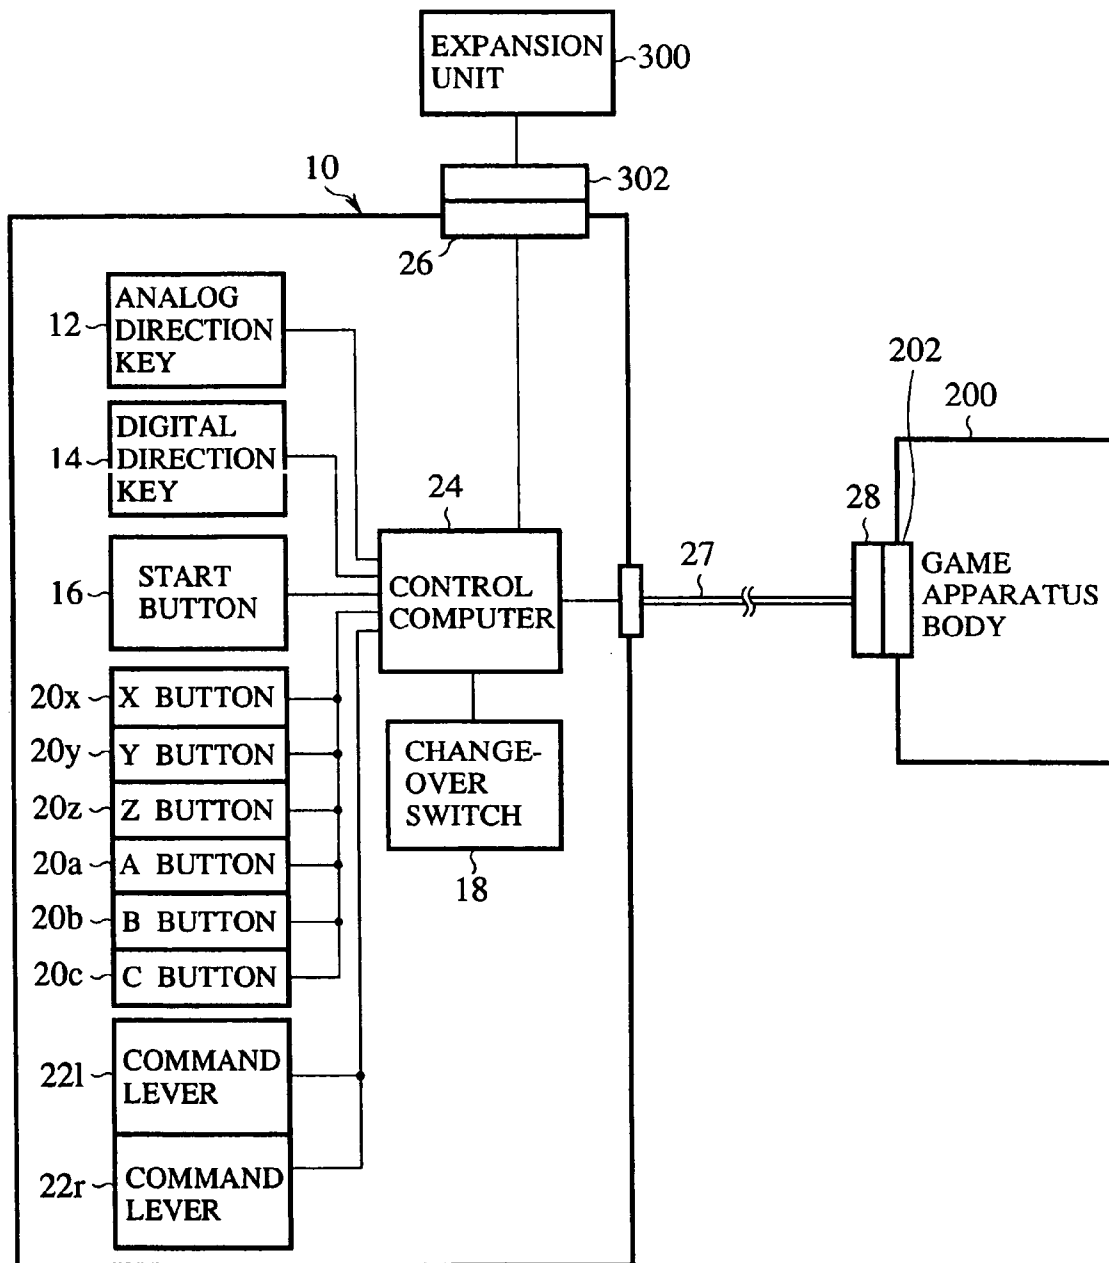


FIG. 12

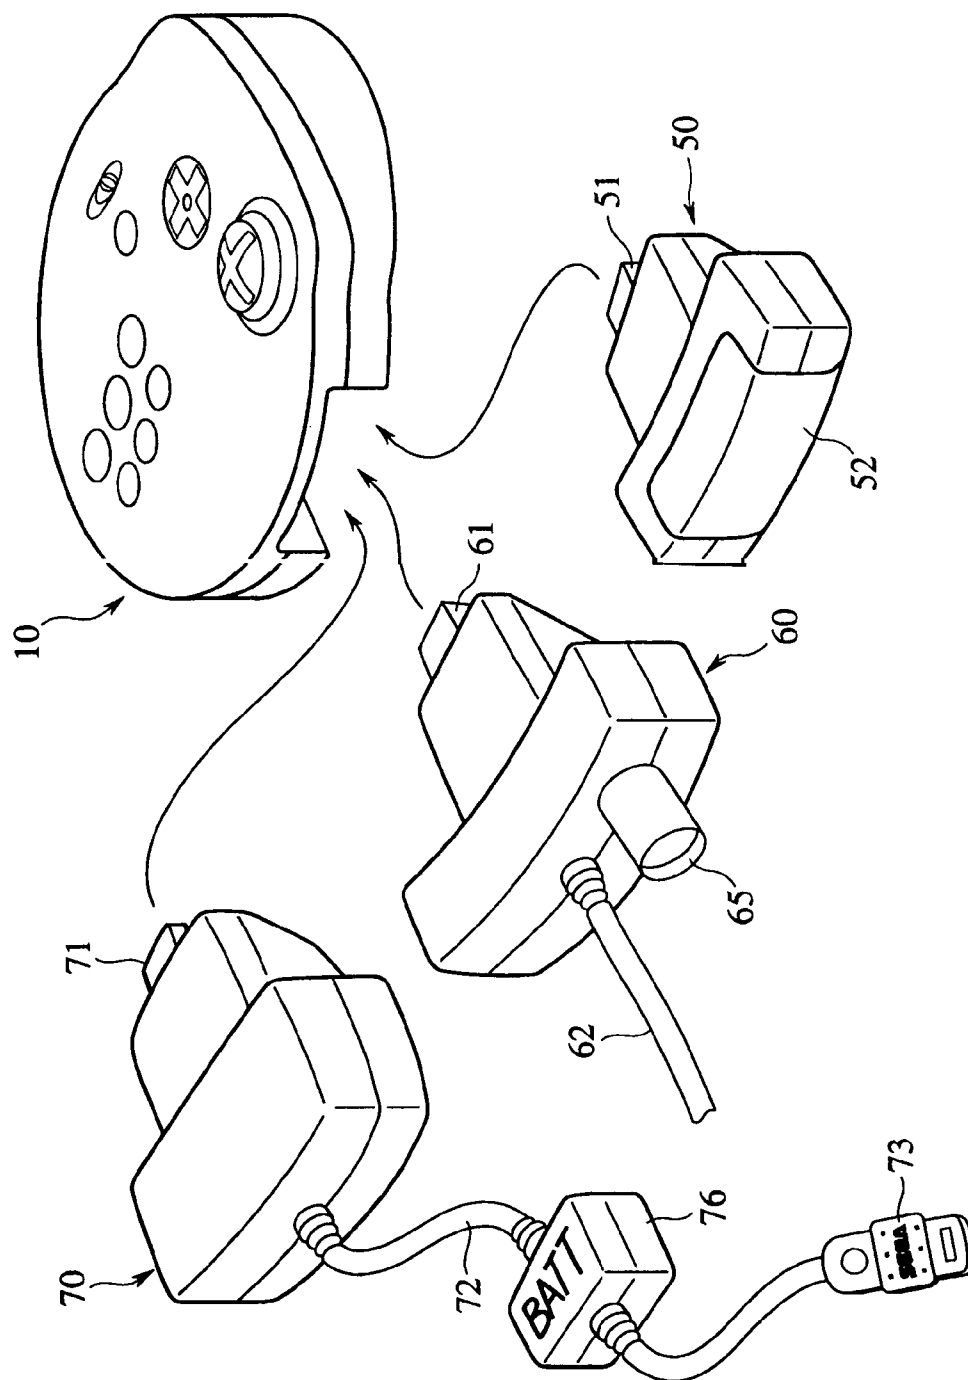


FIG. 13

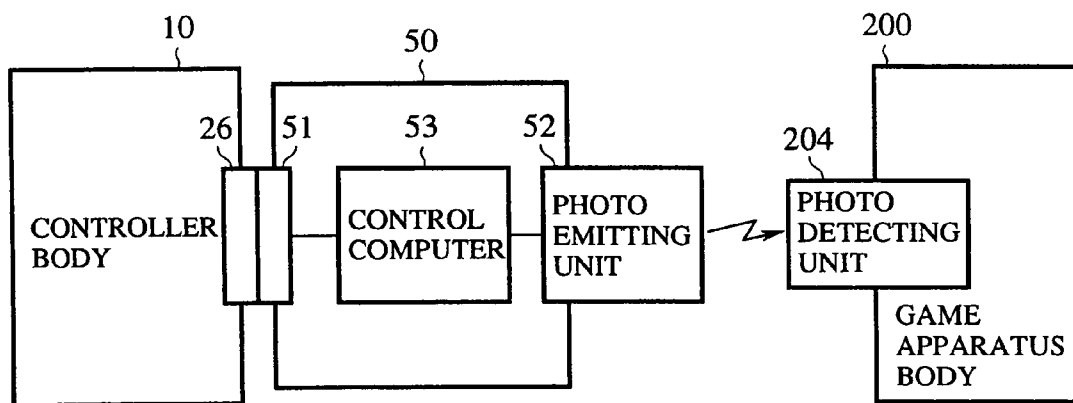


FIG. 14

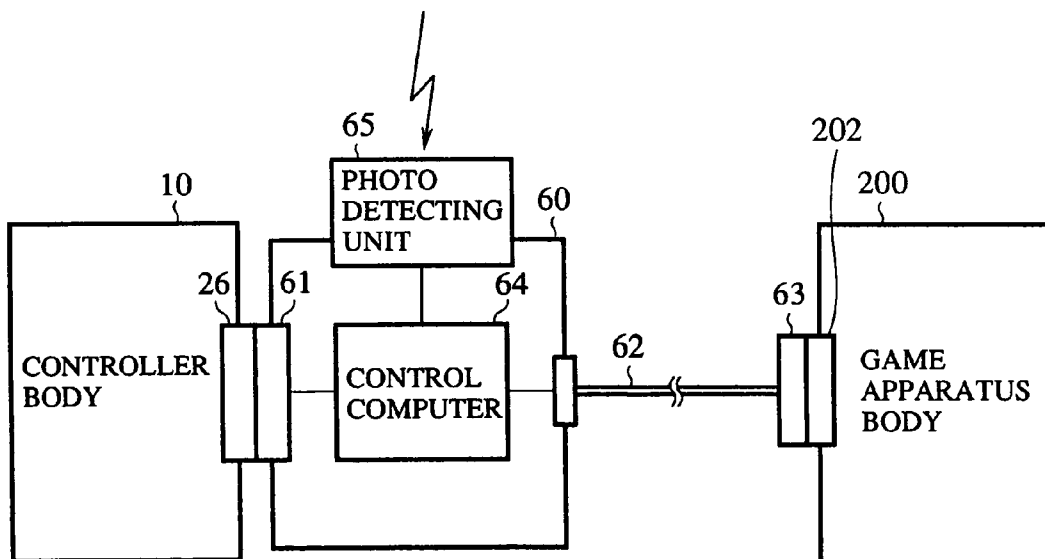


FIG. 15

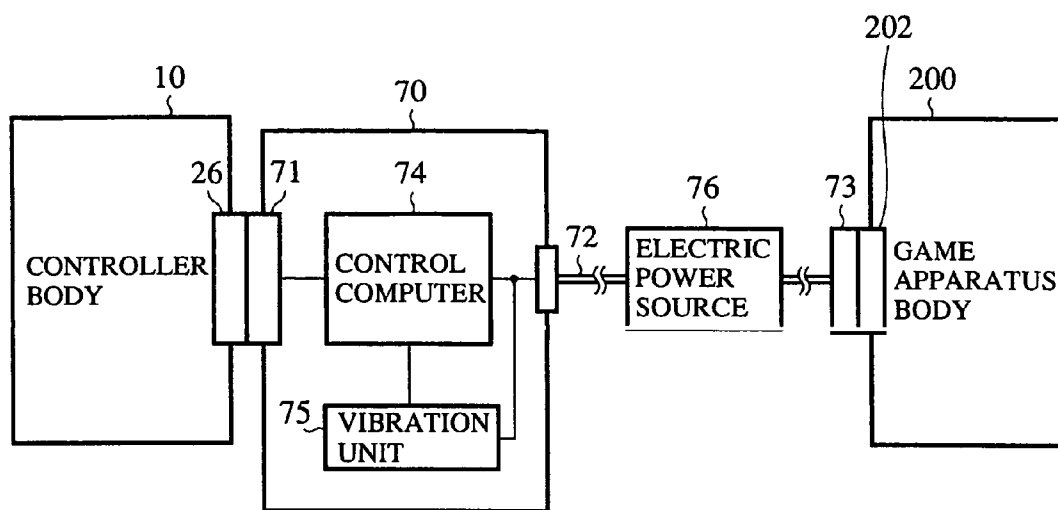


FIG. 16

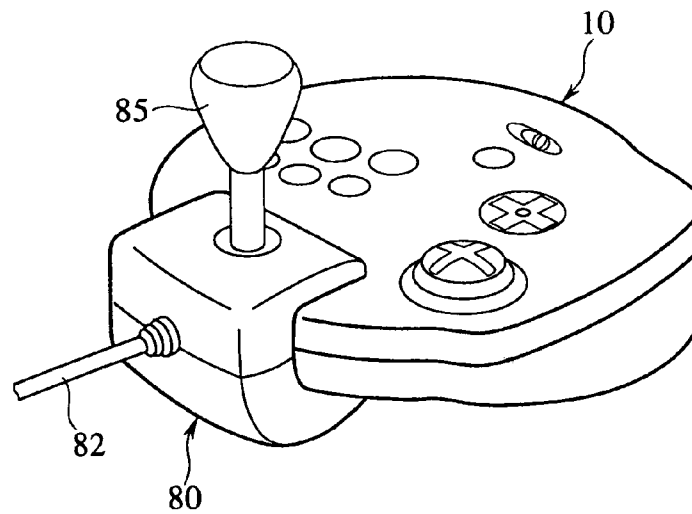


FIG. 17

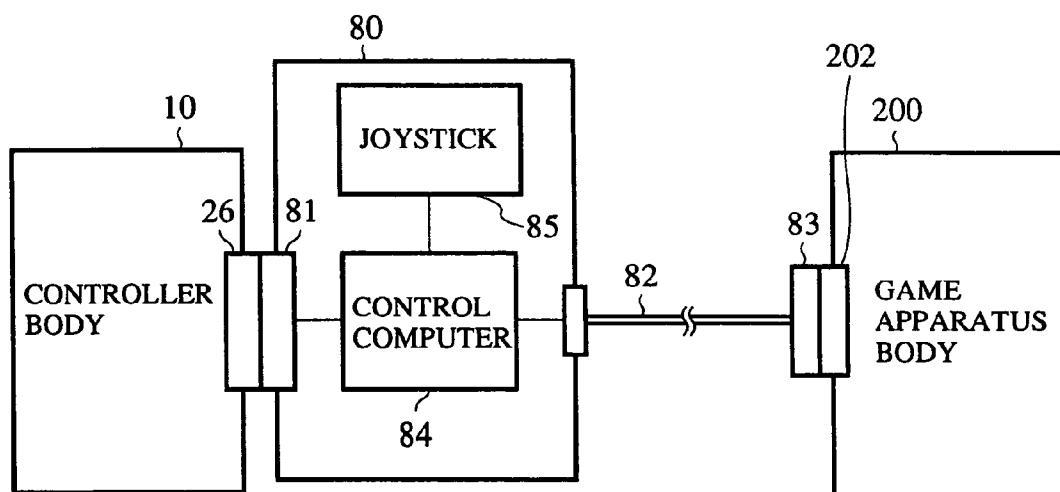


FIG. 18

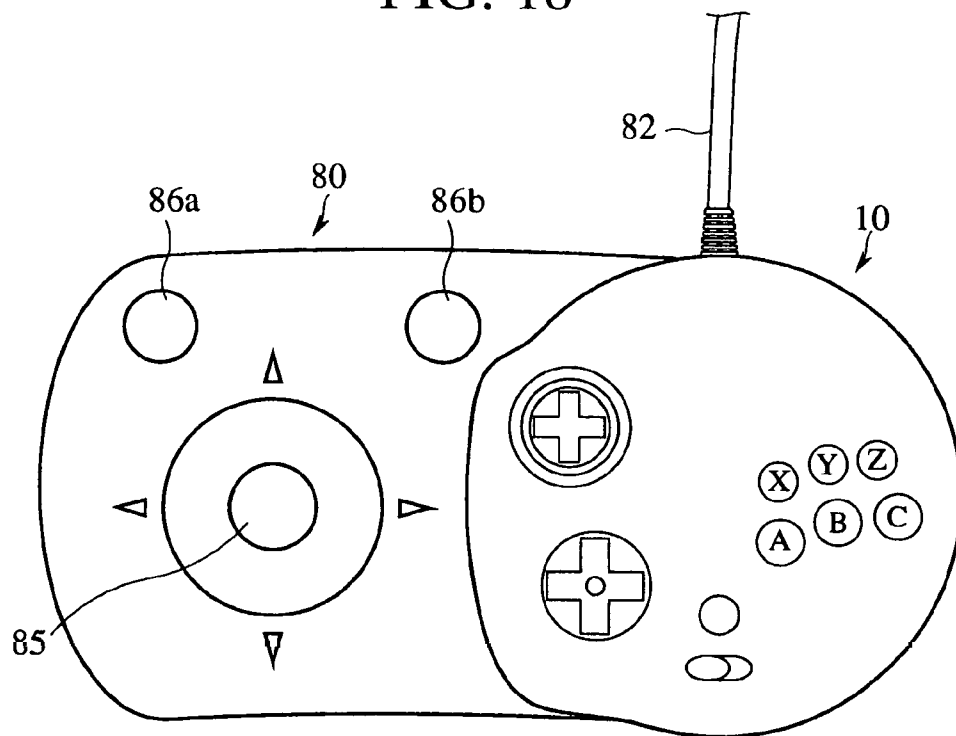


FIG. 19

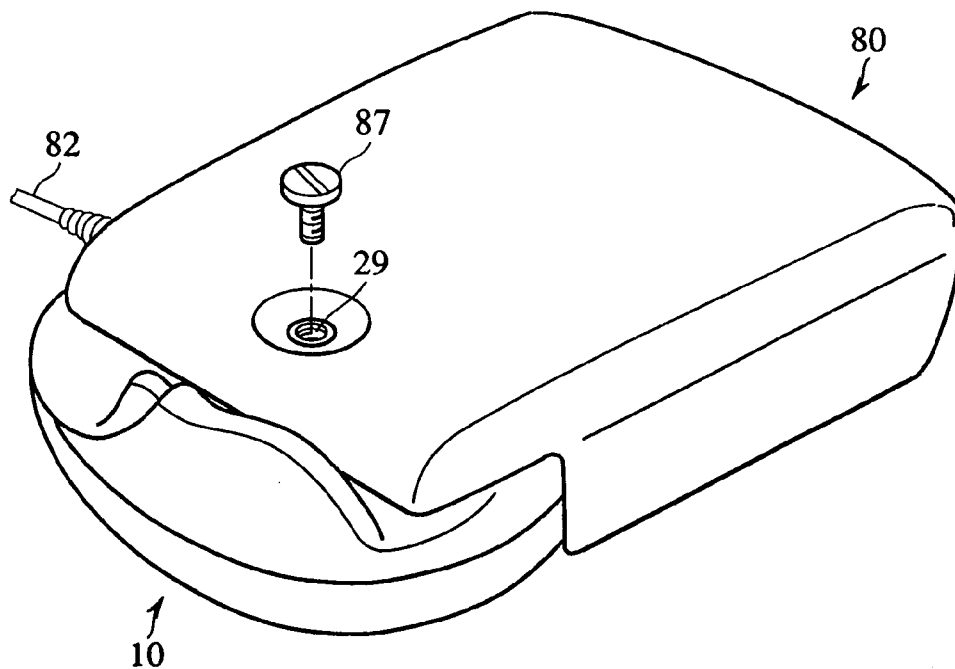


FIG. 20

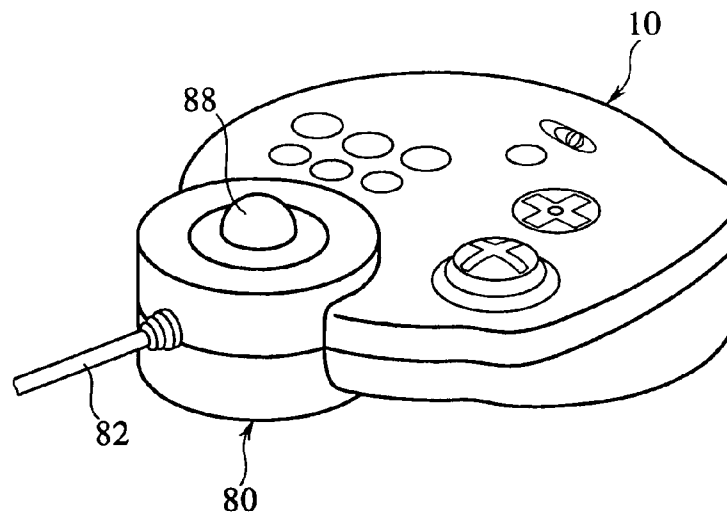


FIG. 21

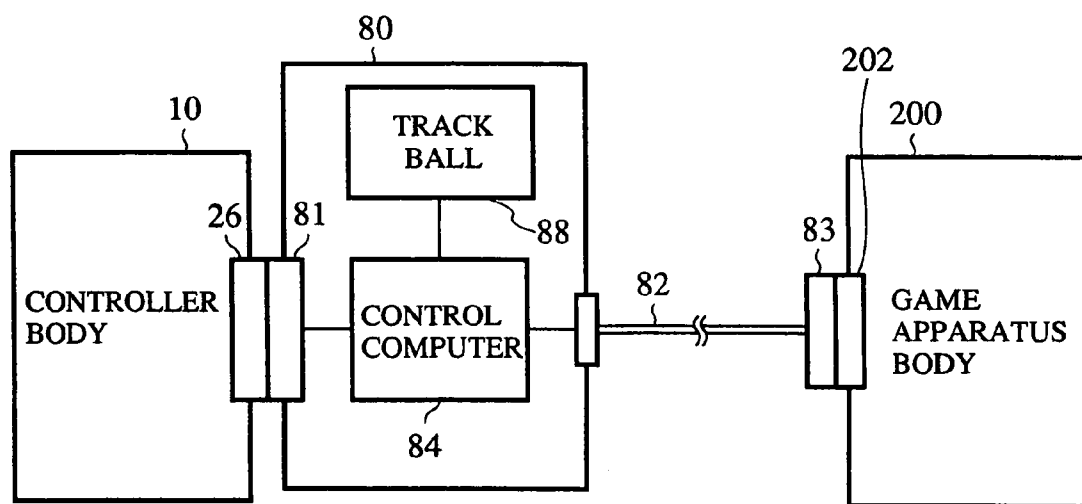


FIG. 22

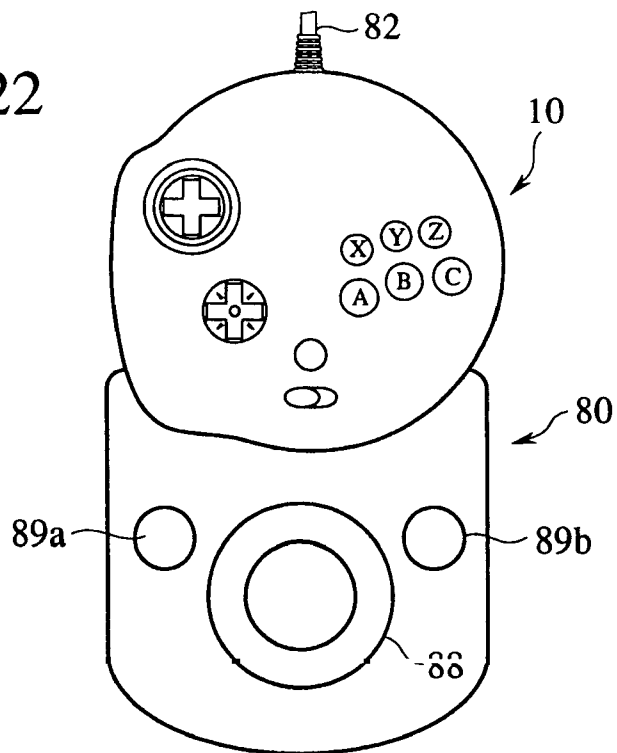


FIG. 23

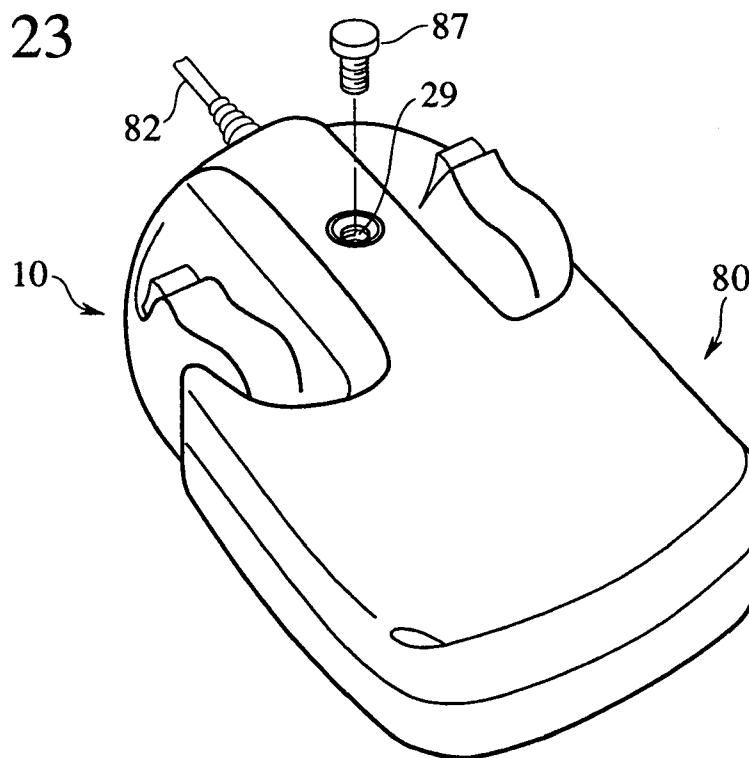


FIG. 24

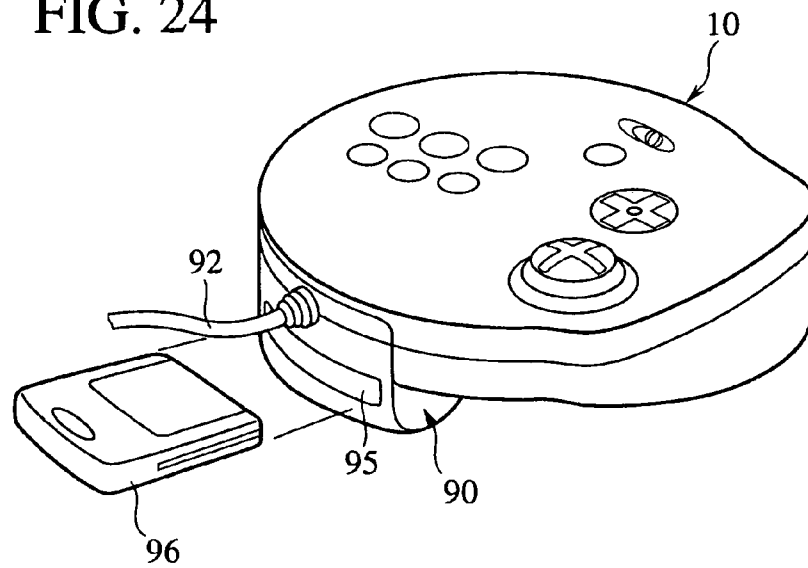


FIG. 25

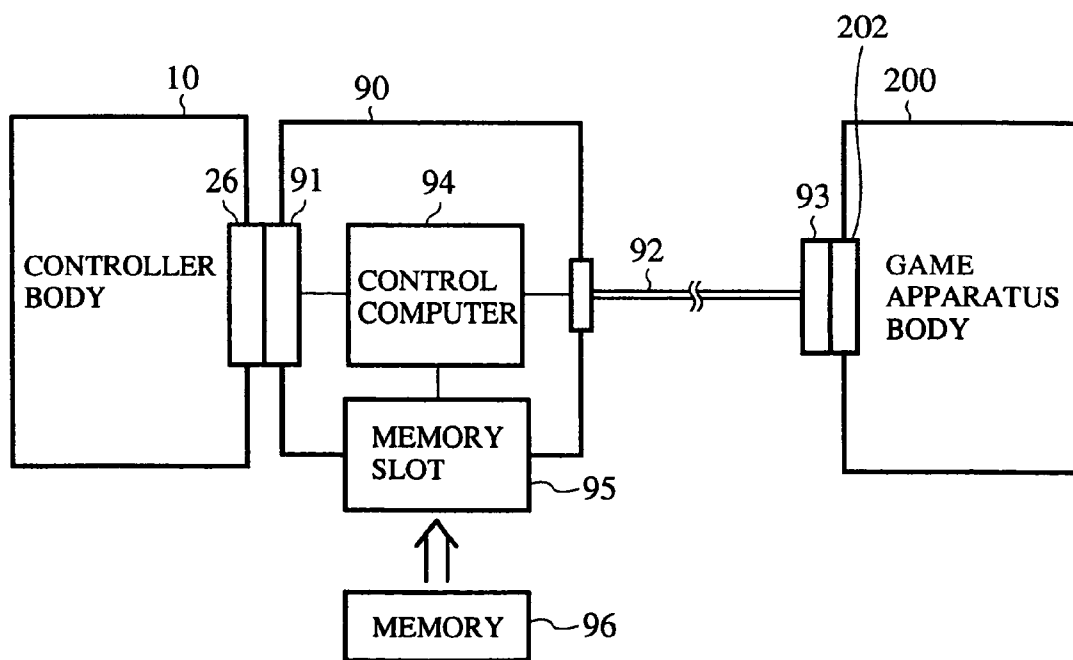


FIG. 26

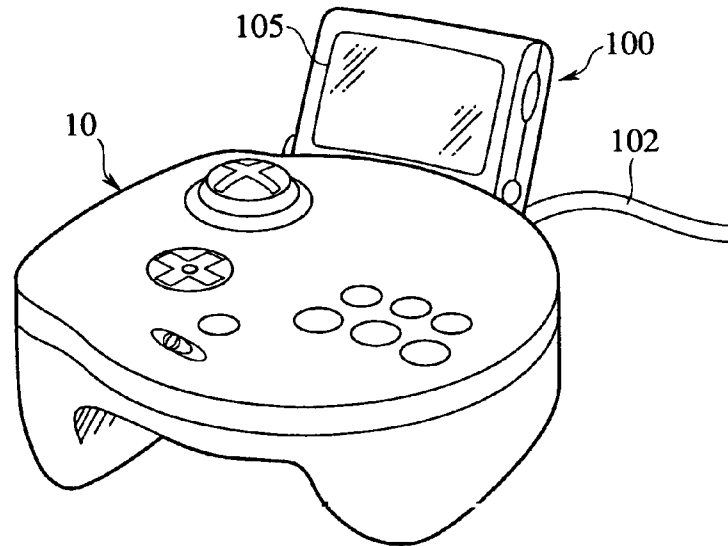


FIG. 27

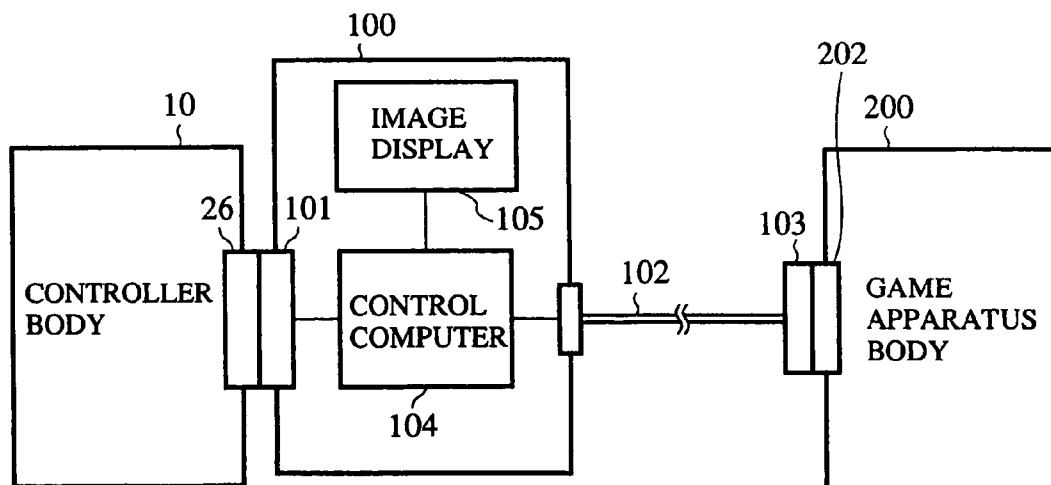


FIG. 28

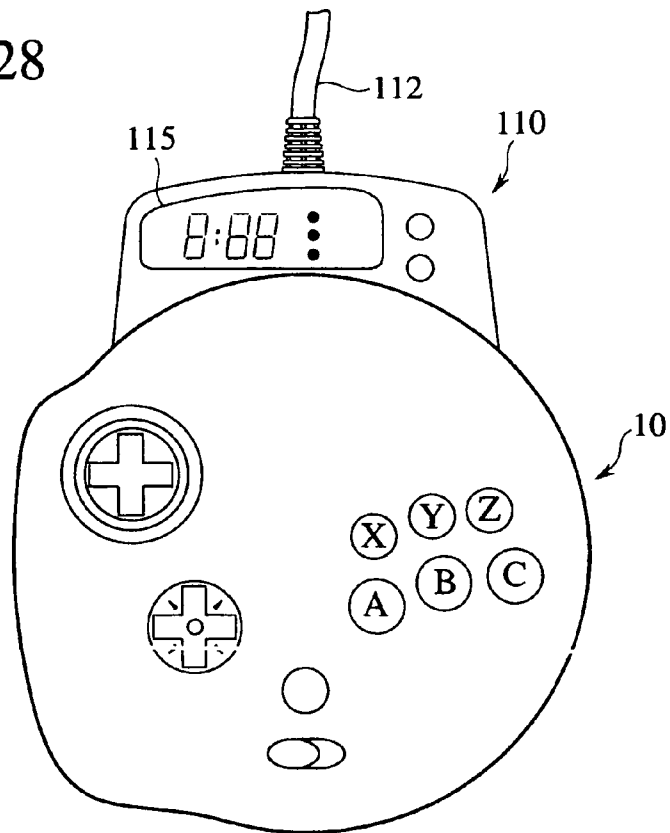
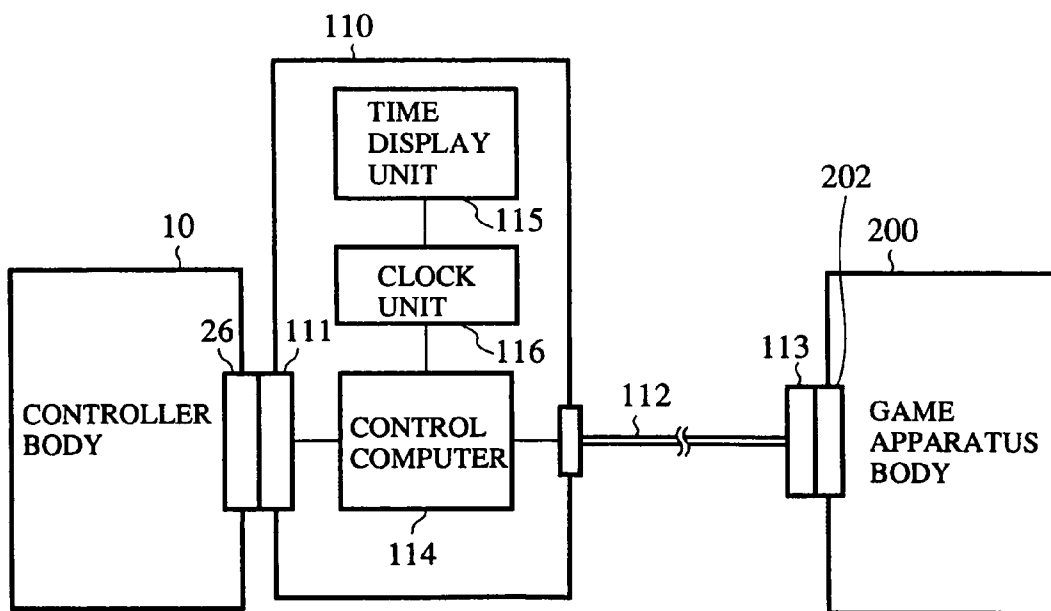


FIG. 29



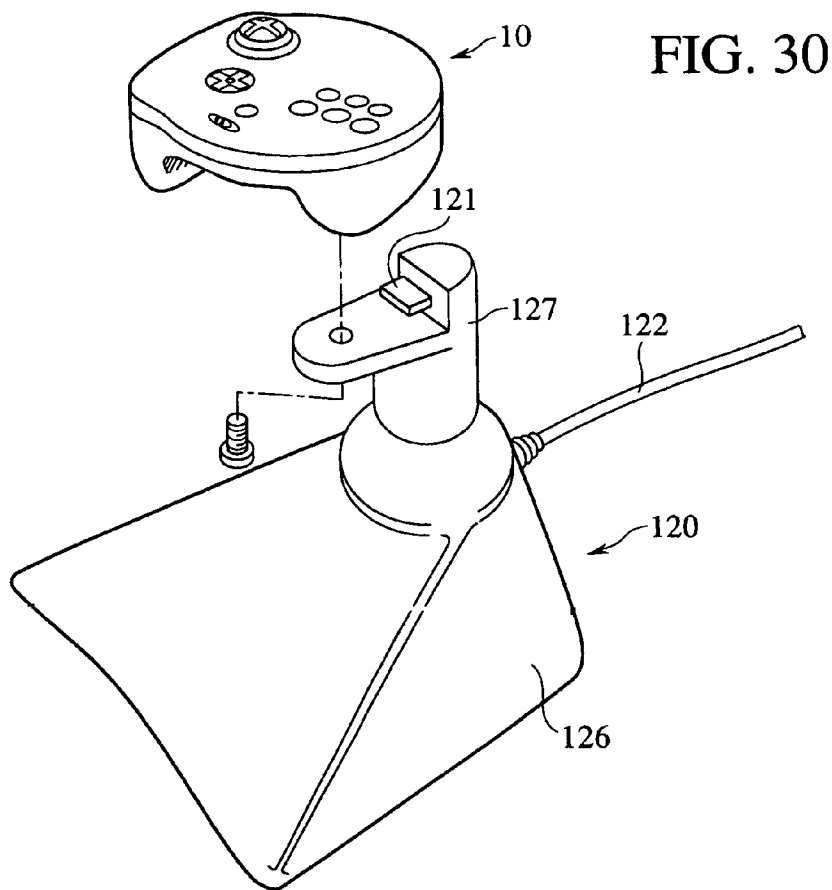


FIG. 31

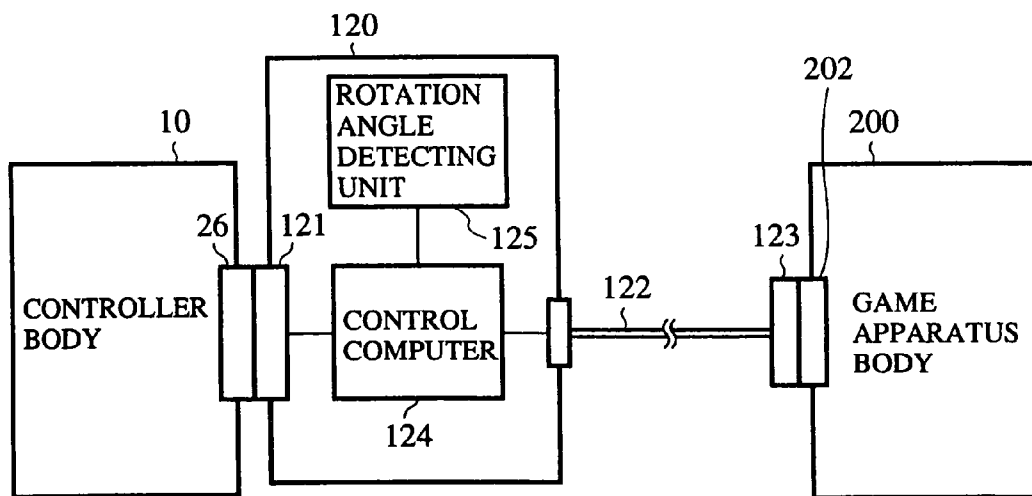


FIG. 32

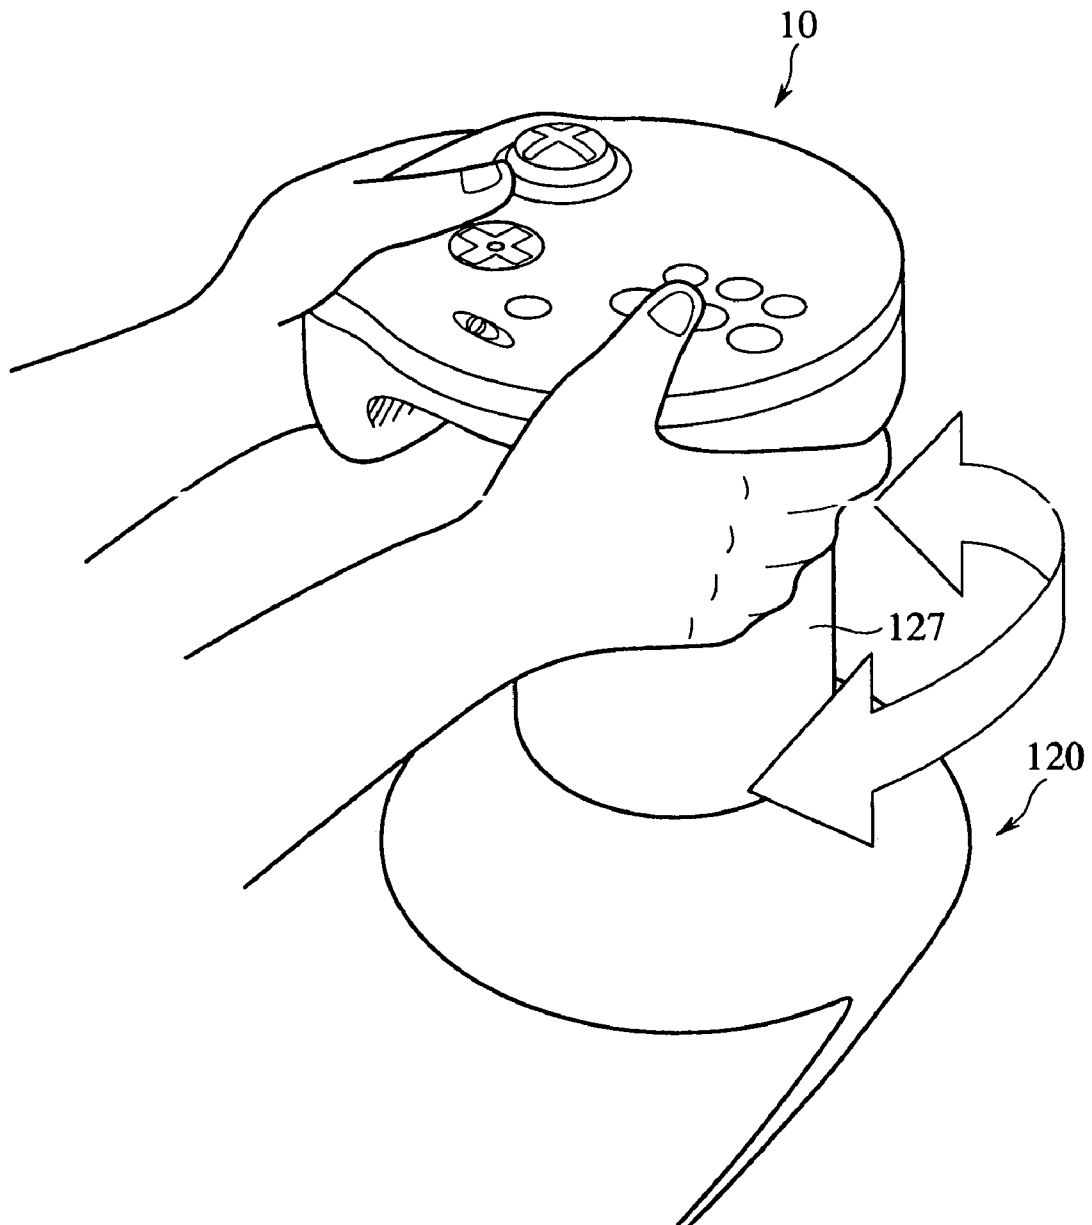


FIG. 33

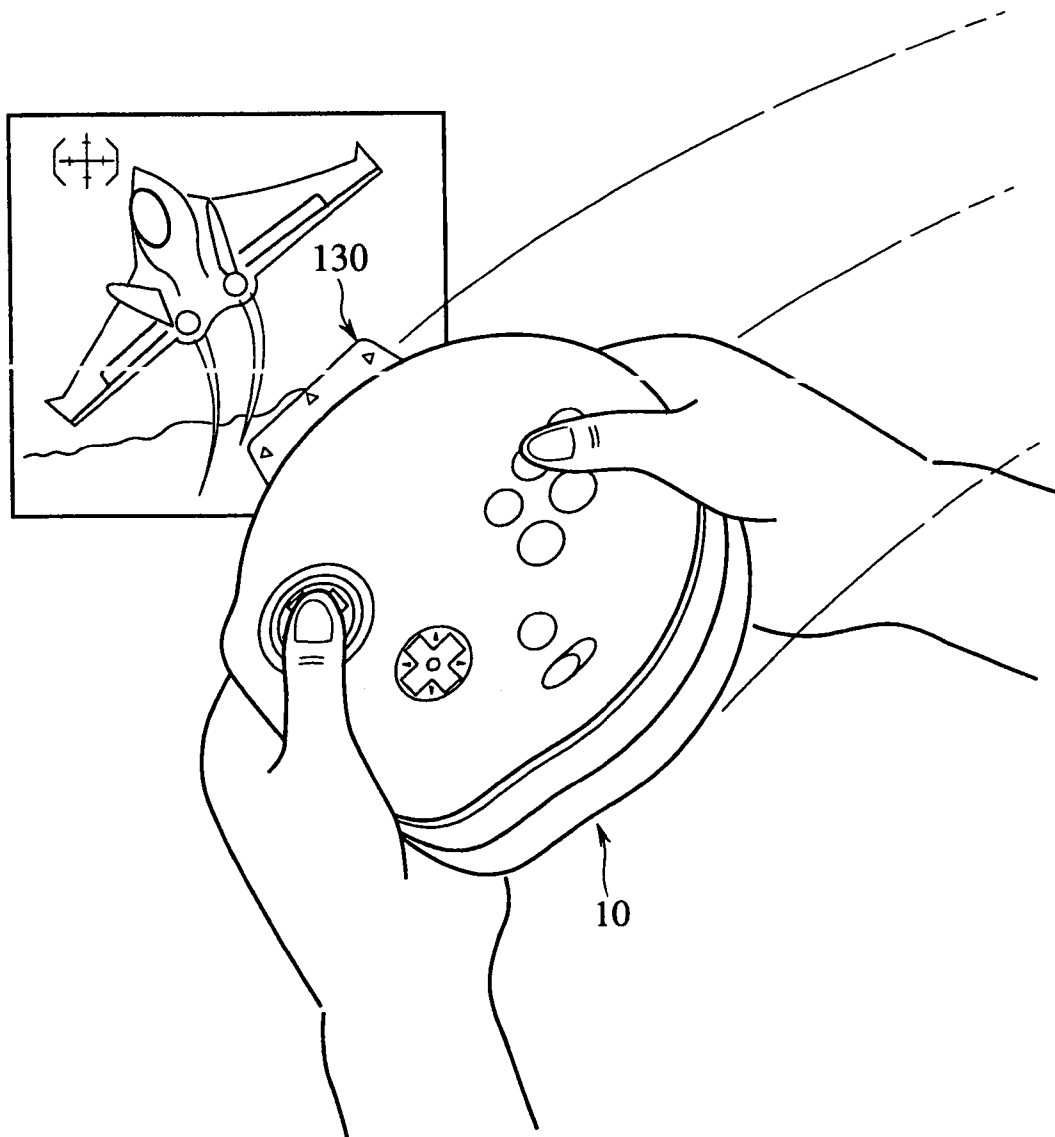


FIG. 34

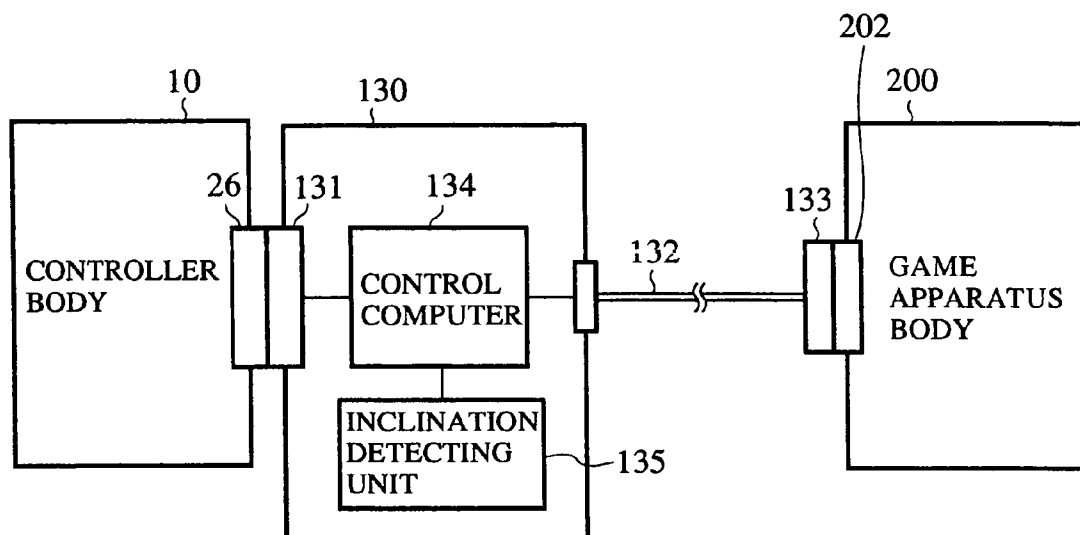


FIG. 35

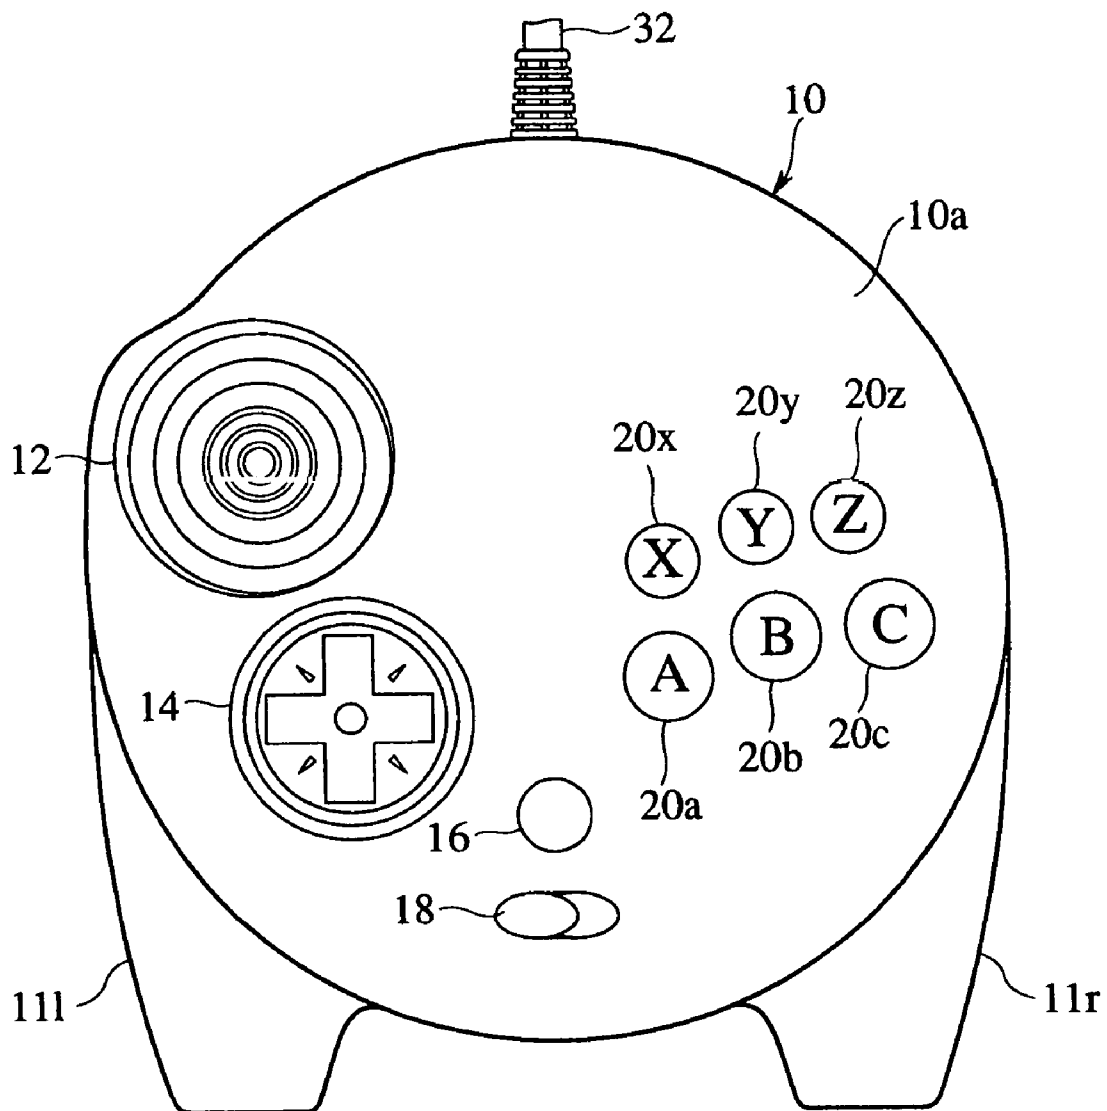


FIG. 36

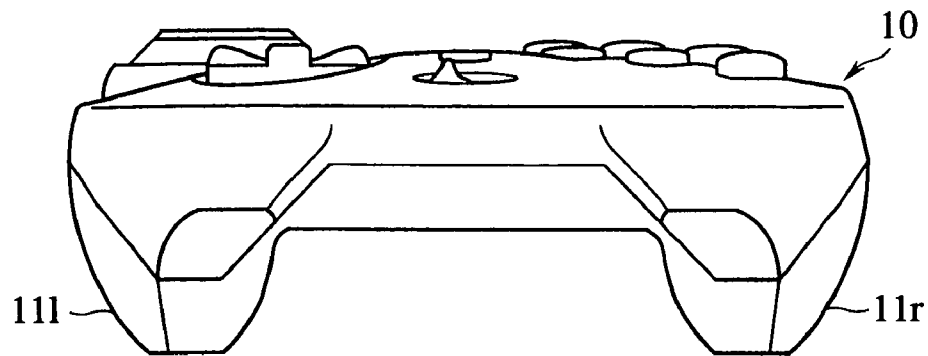


FIG. 37

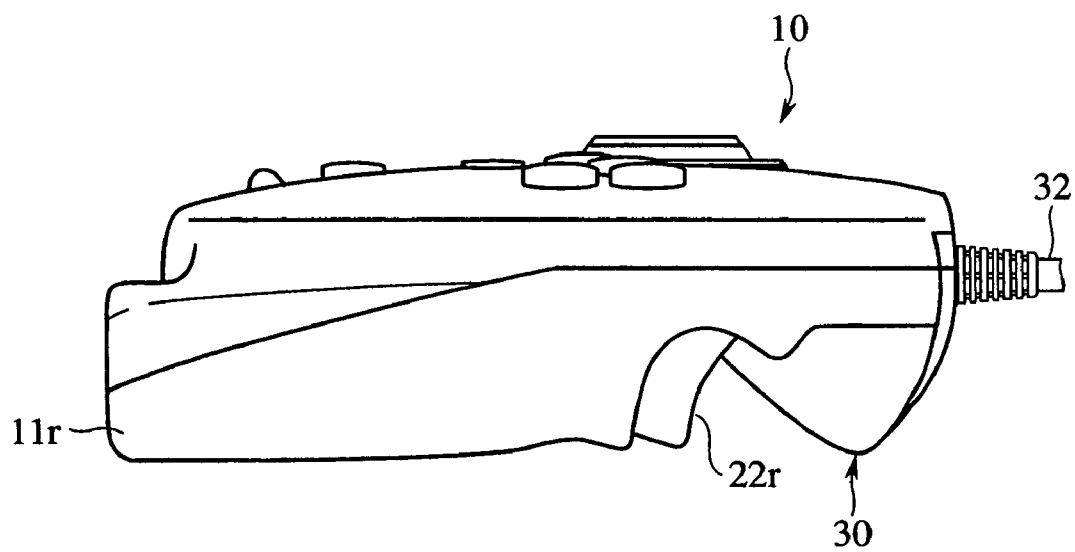
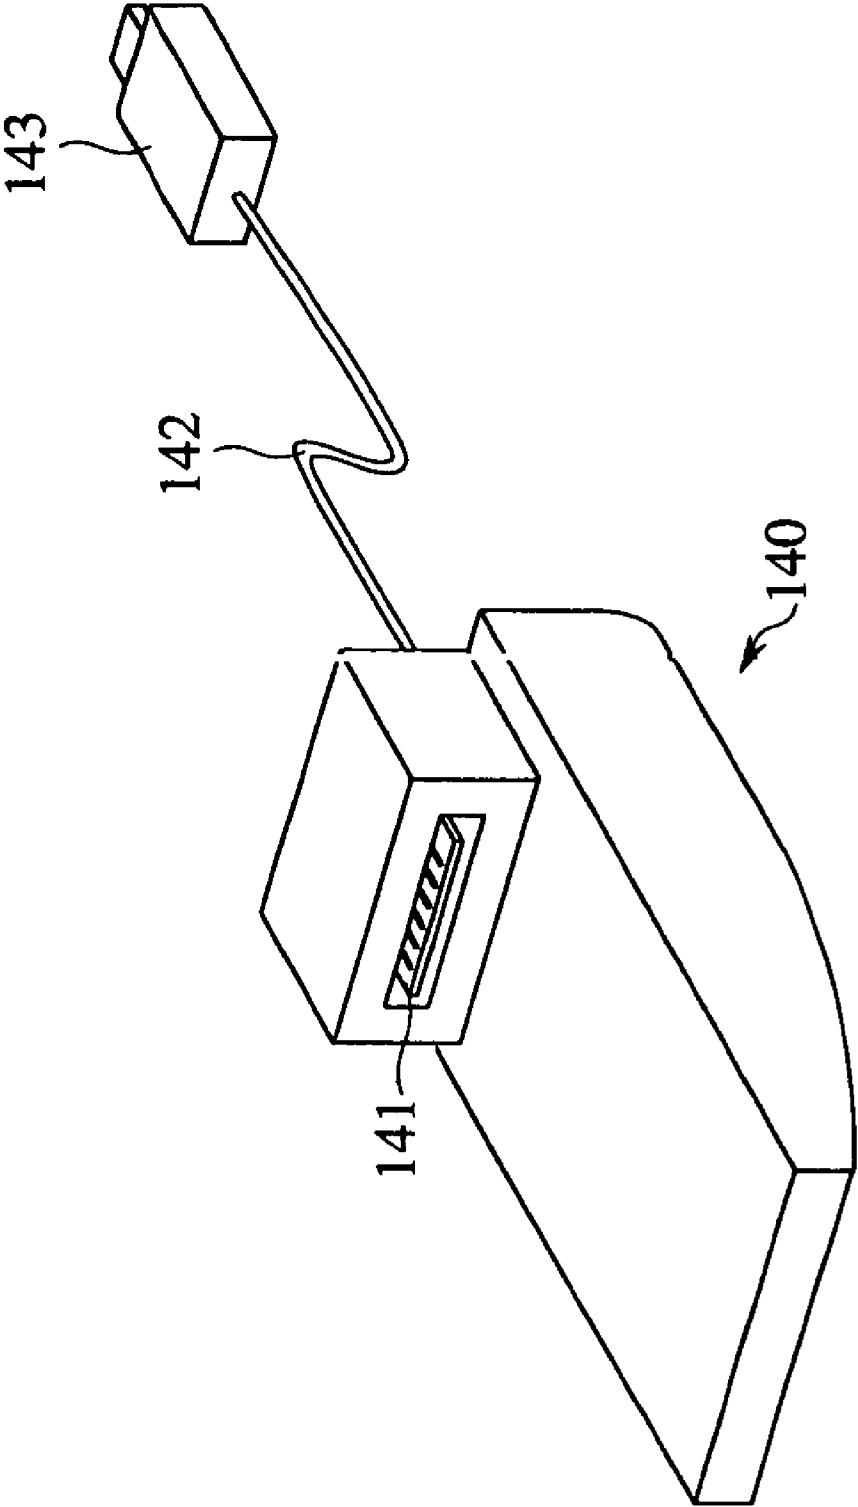


FIG. 38



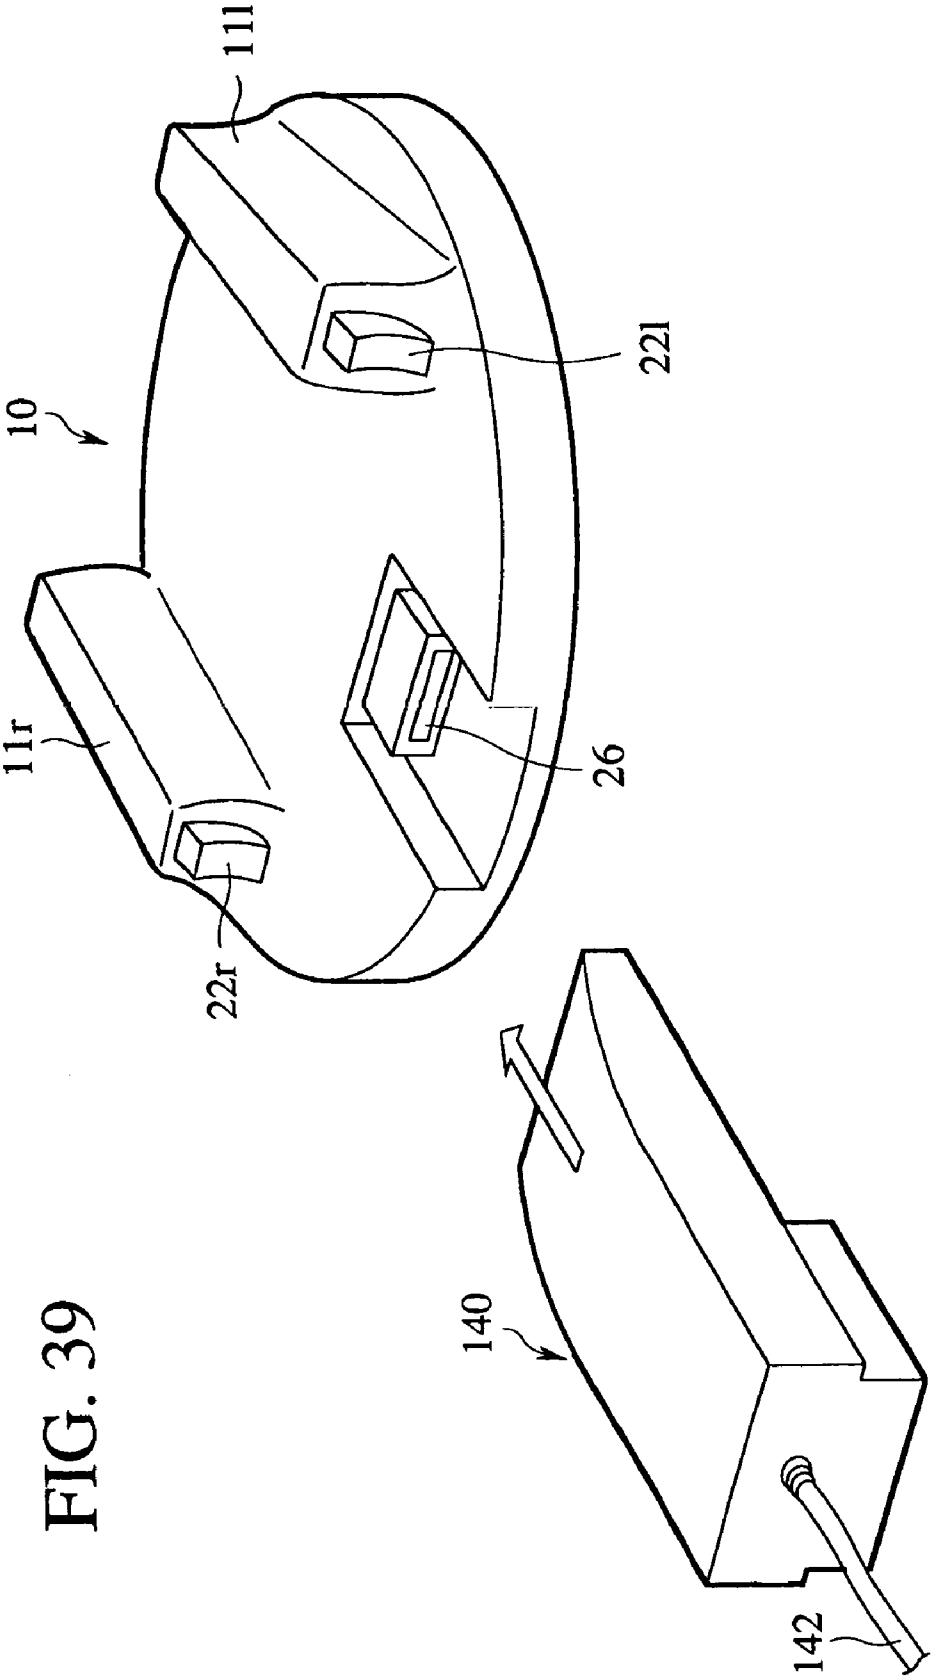


FIG. 40

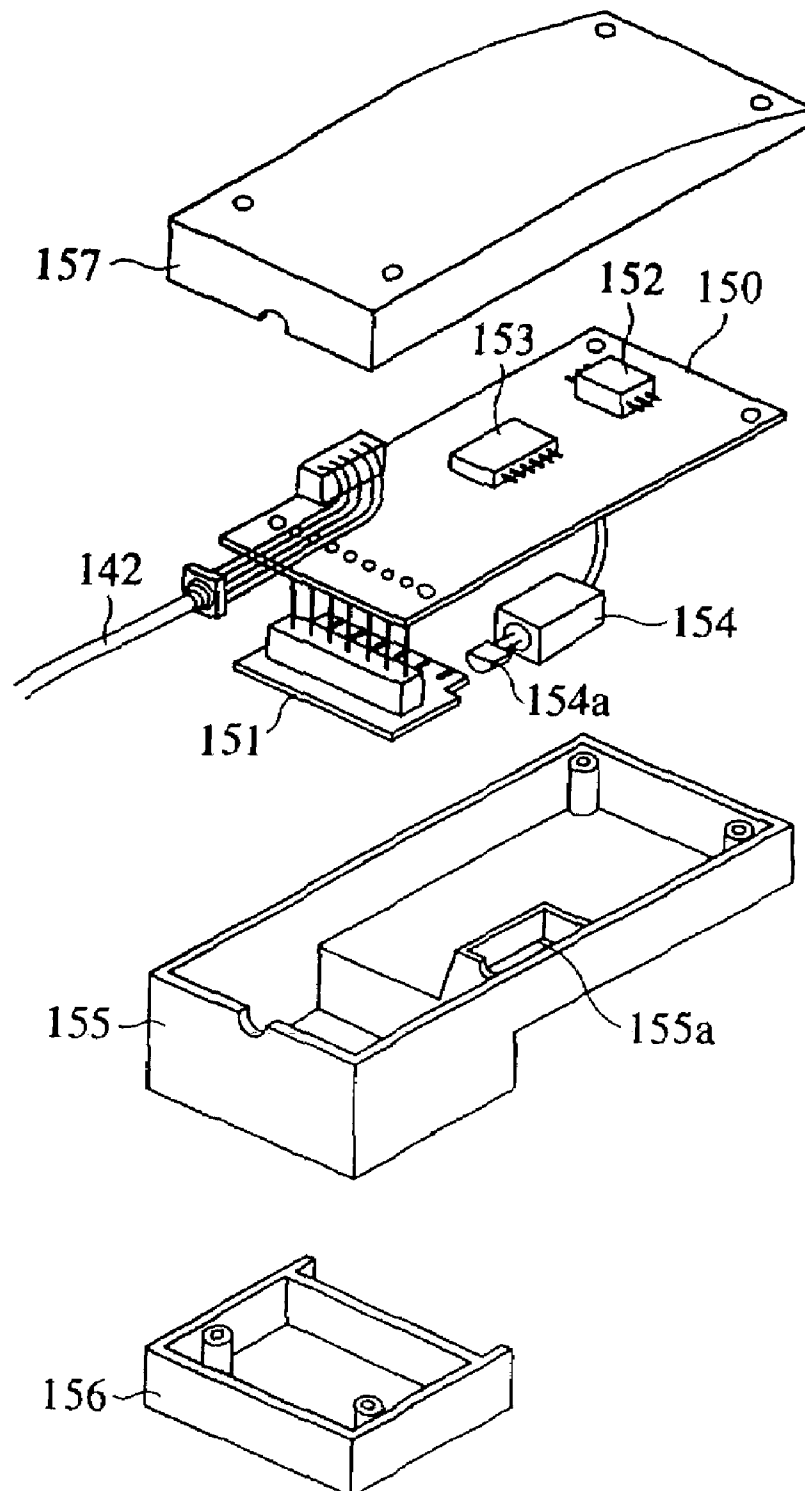


FIG. 41

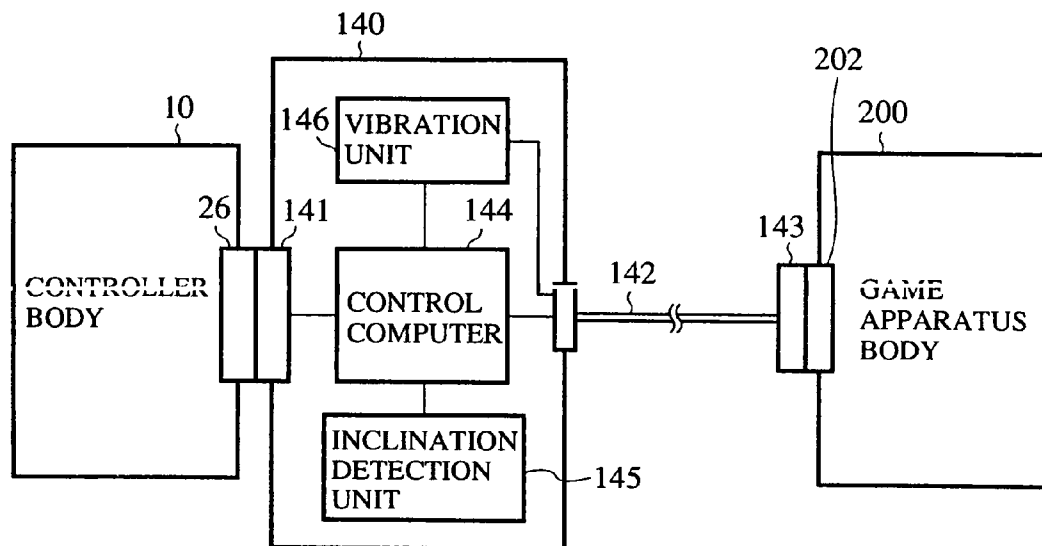


FIG. 42A

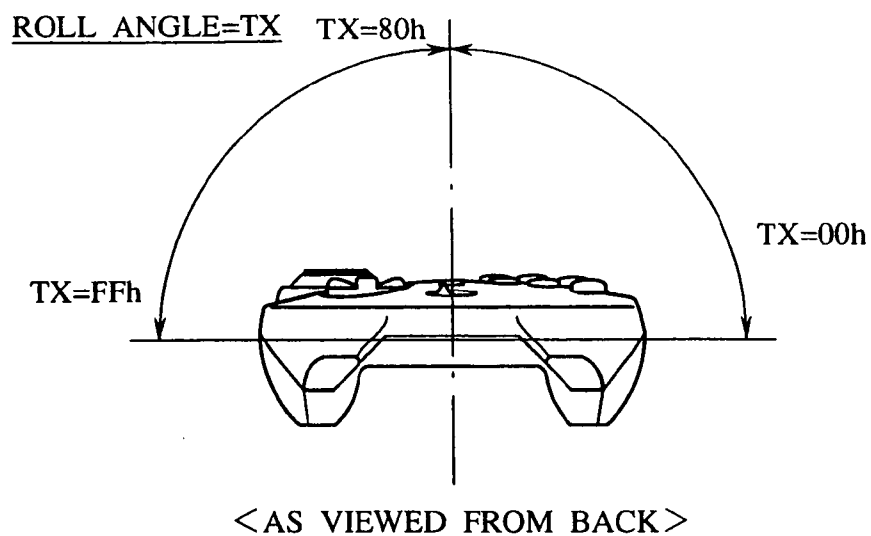


FIG. 42B

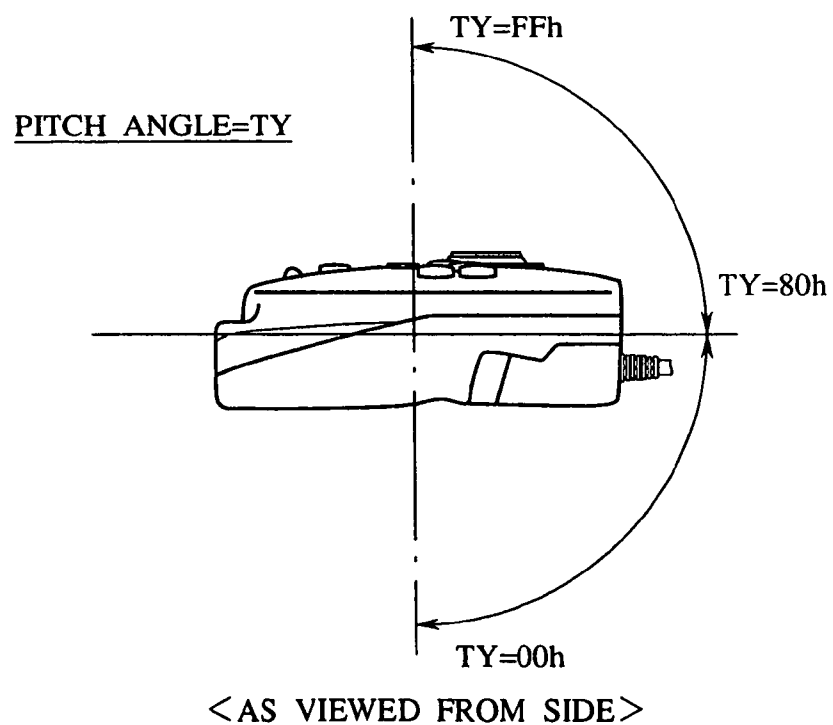


FIG. 43

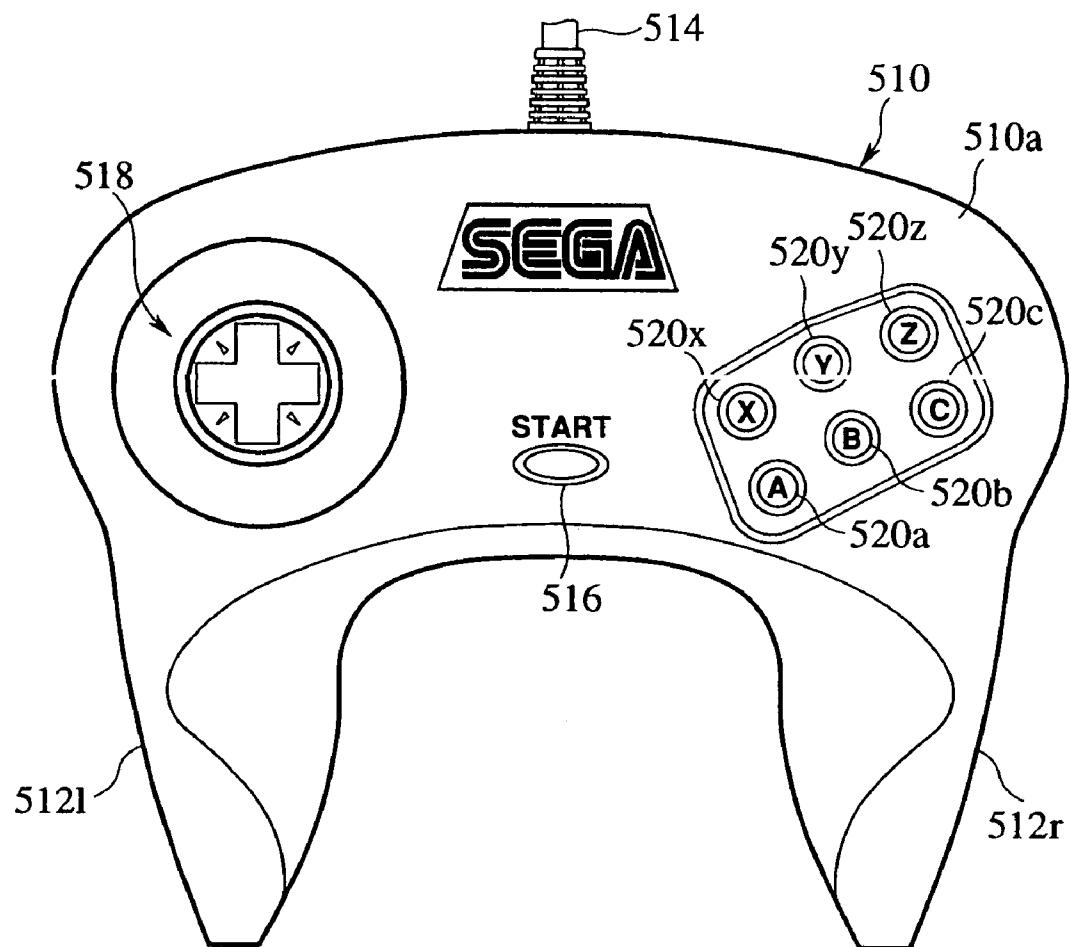


FIG. 44

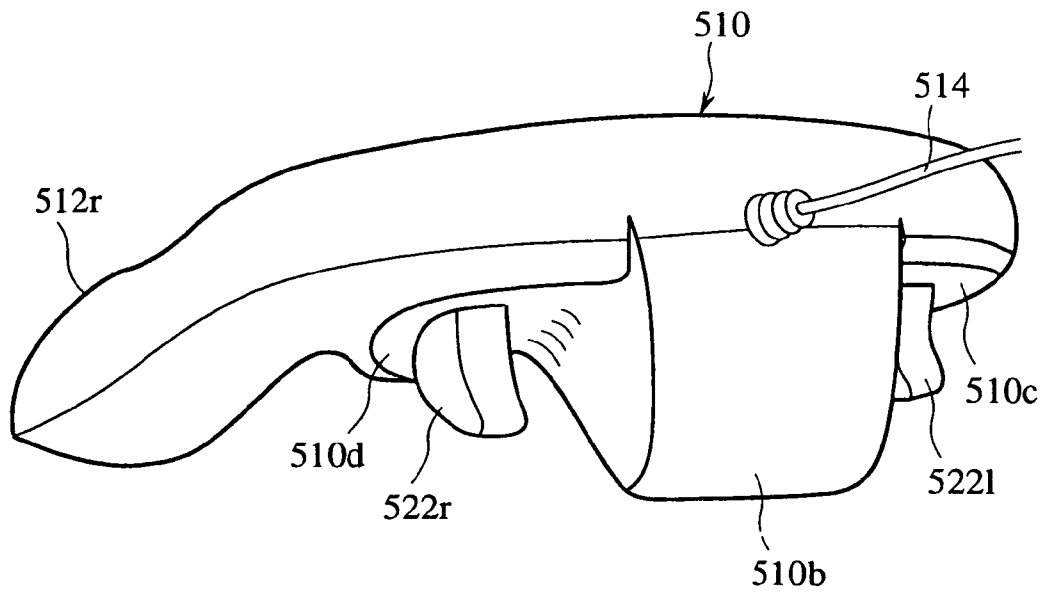


FIG. 45

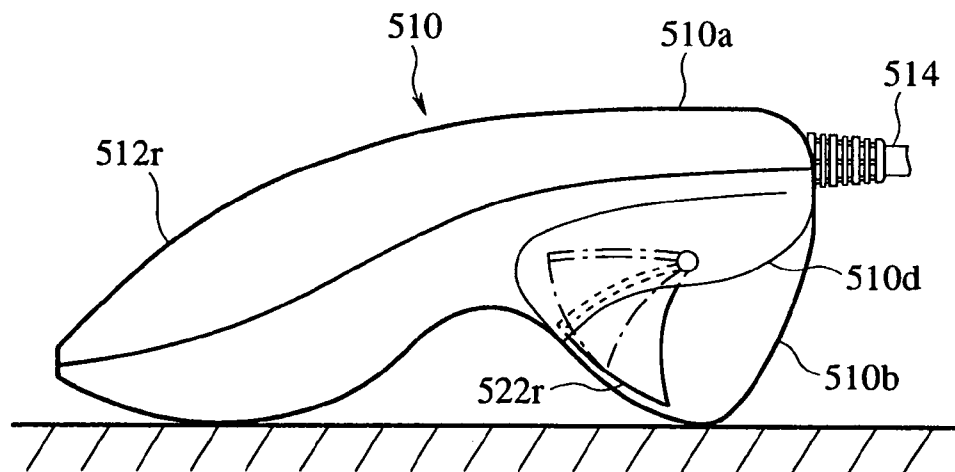


FIG. 46

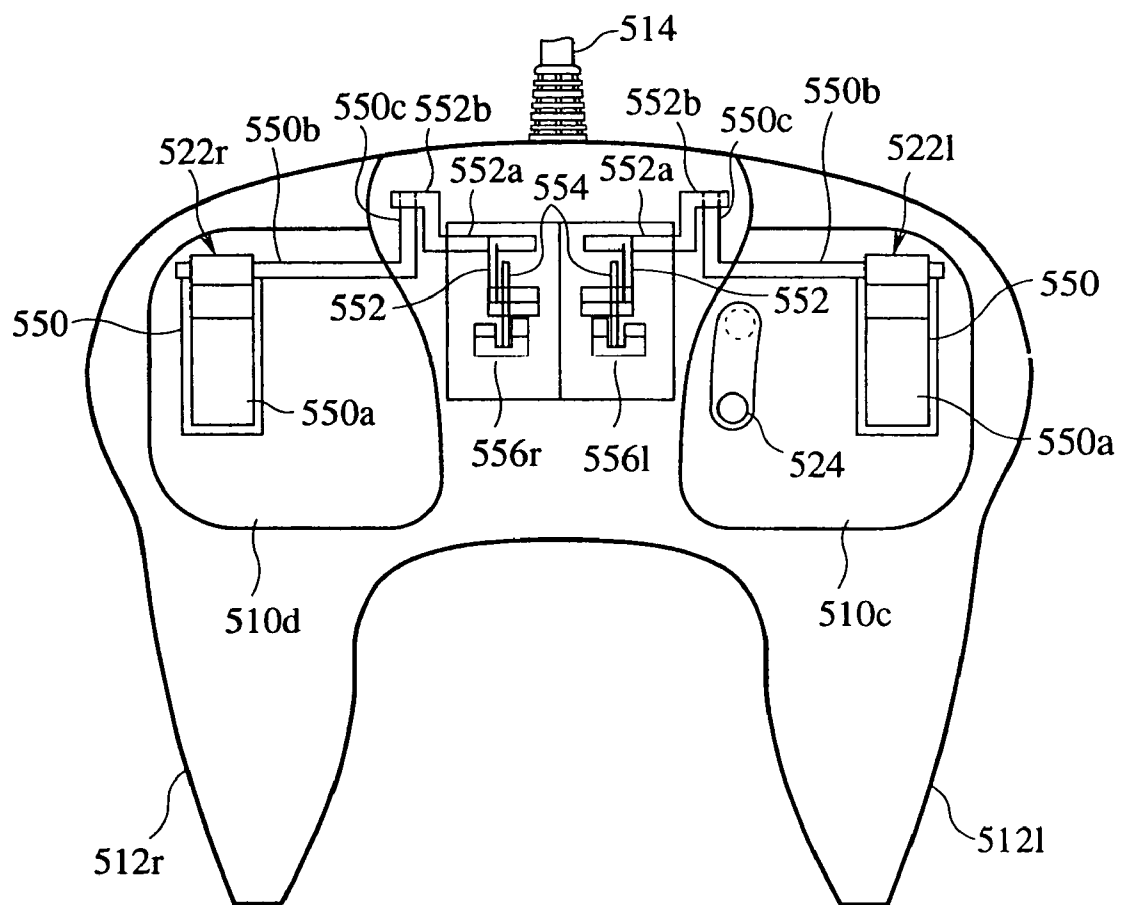


FIG. 47

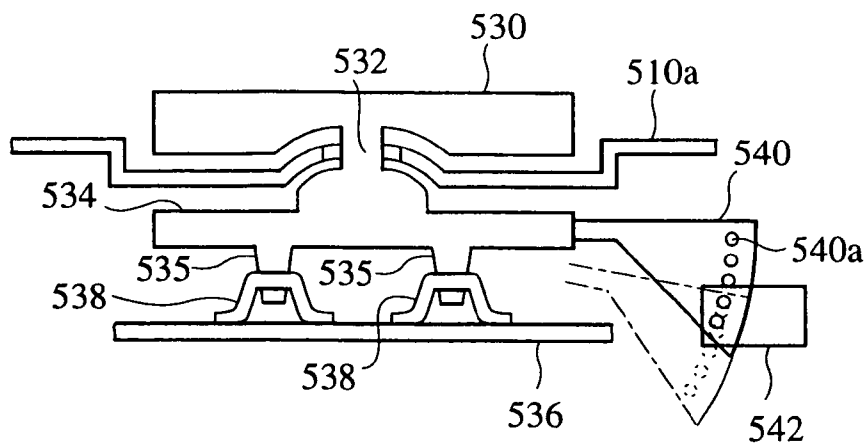


FIG. 48A

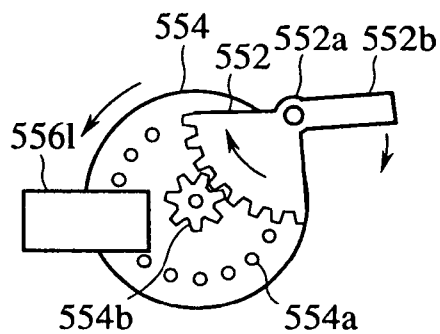


FIG. 48B

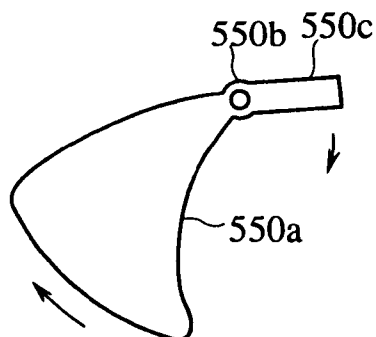


FIG. 49


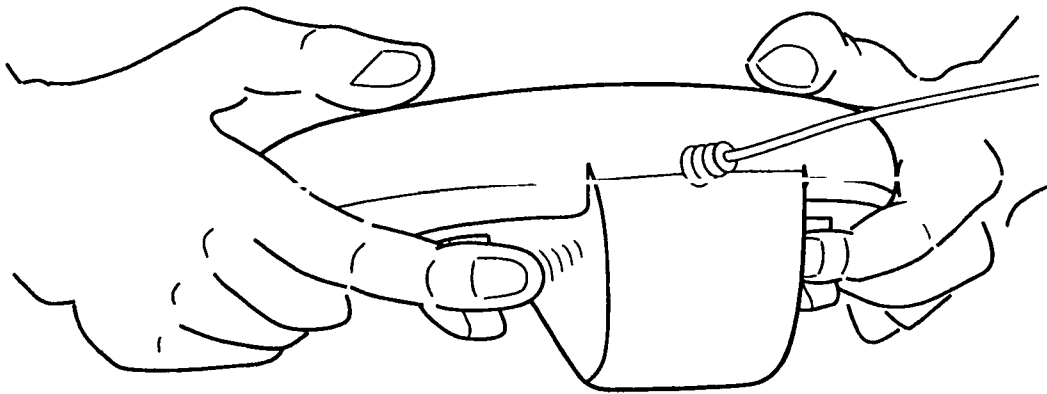


FIG. 50

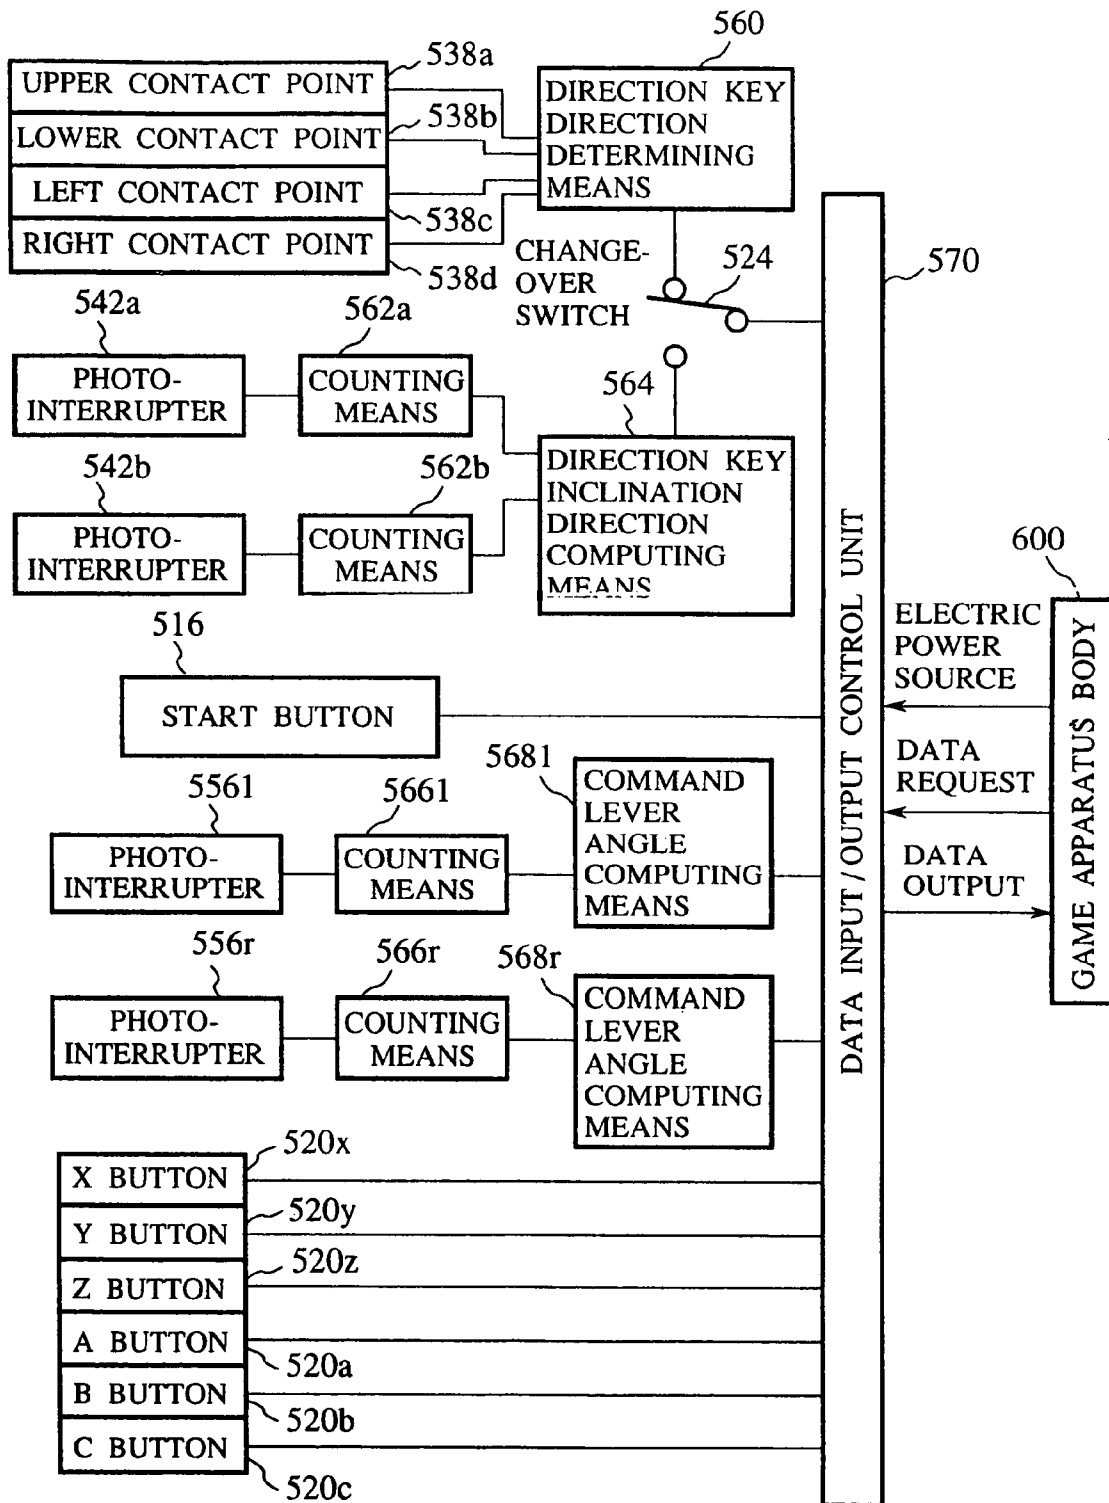

1

CONTROLLER AND EXPANSION UNIT FOR CONTROLLER

This application is a divisional application of U.S. patent application Ser. No. 10/106,022, filed Mar. 27, 2002, now U.S. Pat. No. 7,081,051, which is a divisional application of U.S. patent application Ser. No. 08/952,312, filed Feb. 27, 1998, now abandoned the entireties of which are incorporated herein by reference.

TECHNICAL FIELD

The present invention relates to a controller which outputs various instructions to an electronic device, such as a game device, by operation of an operator.

BACKGROUND ART

More than several years have passed since video game devices for domestic use first appeared, and recently a large variety of entertaining games have been developed. Video games for the domestic use are very popular as an entertainment. Domestic game devices are connected to input means called controllers. Players operate the controllers to output various instructions to the game devices.

Thus the controllers intervene between the players and the game devices, and act as a man-machine interface, and thus are very important to the game devices. The ease of operation as well as the functional ability of the controllers are closely related to the feasibility and entertainment value of games.

Various types of controllers for the domestic game devices have been proposed, but in general most controllers for the domestic video game devices include direction keys which command directions as well as a plurality of command buttons.

However, the command buttons of the conventional controller can make only one command by one operation thereof, and is unsuitable to continuously make commands. It is very difficult especially to make command which are continuously changed. When continuously changed commands must be made, nothing other than unnatural operations of pushing the command buttons for various periods of time or pushing the command buttons repeatedly a number of times.

The direction buttons of the conventional controller can command only four or eight directions, and cannot command directions between these directions, and continuous direction changes.

The conventional controller originally had only the direction keys and two command buttons, but as games have become complicated, two command buttons have been increased to three, and recently six command buttons have become common. Six buttons are a limit to be easily operated by one player, which has made it difficult to meet new games which require more command buttons.

Recently the method for operating the controller has become increasingly complicated, which makes it difficult for players to stably operate the controller. A controller which can be stably operated is required.

When a game producer thinks up contents of a game, it is necessary for him to keep in mind, the ease of operational of the controller. Also, the functional ability of a controller and game contents are closely related. Usually common controllers are used when games are designed. Thus, their functional ability and ease of operation of the controller limit the contents of a game.

2

Conversely, in order to give priority to the game's contents, new controllers that are more suitable for the game contents are provided in some cases. Unfortunately, a large burden is places on the users.

To add controller functions to suit the contents of a particular game, expansion units can be connected to a controller. In order for any expansion unit to be connected, a controller which permits any expansion unit which will appear to be connected must be designed. This method also has a limit.

Conventional controllers, on the other hand, are totally inconsiderate of a player's grip. For example, the contour of a conventional controller is merely rectangular or parallel, and sometimes a handle is merely provided on the controller.

Players may be children or adults, and may have various hand sizes and various gripping habits. Depending on the game contents, it may be better to change carrying way of the controller. The conventional controller does not meet such requirements.

An object of the present invention is to provide a controller expansion unit which can freely realize a controller having a function suitable for contents of a game.

Another object of the present invention is to provide a controller which can be gripped in various ways according to the operator's preference.

Further another object of the present invention is to provide a controller which can be gripped in ways such that operators can easily operate the controller.

Further another object of the present invention is to provide a controller which can make commands which are continuously changed.

Further another object of the present invention is to provide a controller which can command an arbitrary direction and continuously changed directions.

Further another object of the present invention is to provide a controller which can include a number of command buttons.

Further another object of the present invention is to provide a controller which can be stably operated.

DISCLOSURE OF THE INVENTION

The above-described objects are achieved by a controller expansion unit which is to be inserted between a controller body including an operation key and a game apparatus, and which supplies a command signal generated by the operation key of the controller body to the game apparatus body, whereby new functions can be added to the conventional controller, and the new functions can be added freely without making no change to the controller body.

The above-described controller expansion unit may comprise function expansion means for expanding a function of the controller body, and conversion means for converting the command signal from the controller body, based on a function expanded by the function expansion means, and supplying the converted command signal to the game apparatus body.

In the above-described controller expansion unit, the function expansion means may include photo signal outputting means for outputting the signal to the game apparatus body as a photo signal, and the photo signal outputted by the photo signal outputting means may be detected by photo signal detecting means of the game apparatus body, whereby the controller can be cordless.

In the above-described controller expansion unit, the function expansion means may include photo signal detecting means for detecting a photo signal from the outside, and the conversion means may add the photo signal from the photo signal detecting means to the command signal from the con-

3

troller body, whereby gun games in which an optical signal from the video monitor is detected to shoot an enemy on a monitor screen.

In the above-described controller expansion unit, the function expansion means may include vibration means for giving a vibration to the controller body, based on the signal from the game apparatus body or the controller body, whereby in a shooting game, for example, vibrations generated upon shooting are added to thereby make the game realistic.

In the above-described controller expansion unit, the function expansion means may include an operation key for effecting a specific operation, and the conversion means may add an operation signal generated by the specific operation keys to the command signal from the controller body, whereby new operational keys can be easily added.

In the above-described controller expansion unit, the function expansion means may include memory means for storing information, and the memory means may store information supplied from the game apparatus body or the controller body, or information supplied to the game apparatus body or the controller body, whereby new memories are added to thereby reinforce functions of the game apparatus.

In the above-described controller expansion unit, the function expansion means may include display means for displaying information, and the display means may display information from the game apparatus body or the controller body, whereby new image display means is added to thereby reinforce functions of the game apparatus.

In the above-described controller expansion unit, the function expansion means may include clock means for counting time, and time display means for displaying time, and the conversion means may add time information counted by the clock means to the command signal from the controller body, whereby games making use of time information can be played.

In the above-described controller expansion unit, the function expansion means include rotation angle detecting means for detecting a rotation angle of the controller body supported thereon, and the conversion means may add rotation angle signals detected by the rotation angle detecting means to the command signal from the controller body, whereby the controller body can be operated as a handle of a car or others.

In the above-described controller expansion unit, the function expansion means may include inclination detecting means for detecting an inclination of the controller body, and the conversion means may add an inclination signal detected by the inclination detecting means to the command signal supplied from the controller body, whereby an inclination of the controller body can be an operation signal, which make games realistic.

In the above-described controller expansion unit, the conversion means supplies an inclination signal given by the inclination detecting means in place of a direction command signal from the controller body, whereby a direction command can be made by an inclination of the controller, which realizes games having new operational feelings.

The above-described objects are achieved by a controller comprising a controller body including an operation key, and the above-described controller expansion unit.

The above-described objects are achieved by a controller comprising, on an operation surface of a body of the controller, a direction key for a direction command, and a plurality of command buttons for outputting a single command, the operation surface of the controller body having a substantially circular outer edge so that an operator can grip the controller body at any positions around the outer edge of the operation surface.

4

In the above-described controller, a part of the outer edge of the operation surface of the controller body may be shaped in relation to a specific direction of the direction key so that, when the operator holds the operation surface with his hand, he can know the specific direction of the direction key, whereby when an operator grips the operational surface with a hand, a specific direction of the direction key can be known.

In the above-described controller, the controller body may include lugs to be held by the operator, and a part of a lug may be shaped in relation to a specific direction of the direction key so that, when the operator grips the operation surface with his hand, he can know the specific direction of the direction key, whereby an operator can know a specific direction of the direction key.

The above-described objects are achieved by a controller comprising: a controller body; a direction key disposed on a first operational surface of the controller body, and commanding a direction; a plurality of command buttons disposed on the first operational surface and outputting one command by one operation; and a command lever disposed on a second operational surface of the controller and outputting continuously changed command amounts by one operation, whereby continuously changed commands can be easily made.

In the above-described controller it is preferable that the direction key comprises: a direction key operating unit; discrete direction determining means for determining a specific direction out of a plurality of prescribed directions, based on a state of the direction key operation unit; and continuous direction determining means for determining continuous command directions, based on a state of the direction key operation unit, whereby an arbitrary direction command and continuously changed direction commands can be made.

In the above-described controller it is preferable that the direction key further including change-over means for changing over the discrete direction determining means and the continuous direction determining means to each other.

In the above-described controller it is preferable that the command lever is a command button which outputs one command by one operation.

In the above-described controller it is preferable that the direction key and the command buttons are disposed at positions which facilitate operation with the left and the right thumbs of an operator when he holds the controller with the left and the right hands, and the command lever is disposed at a position which facilitates operation with the fingers other than the thumbs, whereby a number of buttons and keys can be easily operated.

In the above-described controller it is preferable that the controller body includes two grips to be held by an operator; and the direction key and the command buttons are disposed at positions which facilitate operation with the left and the right thumbs of the operator when he holds the two grips with the left and the right hands, and the command lever is disposed at a position which facilitates operation with the fingers other than the thumbs. When the controller is operated, held with the hands, the grips are firmly held with both hands, which makes the operation stable.

In the above-described controller it is preferable that a projection is provided on the second operational surface of the controller body; the controller can be placed on a flat surface, supported by the projection and the two grips; the direction key and the command buttons are disposed at positions which facilitate operation with the left and the right thumbs of an operator when the controller is placed on a flat surface, and the command lever is disposed at a position which facilitates with the fingers other than the thumbs. When the controller is placed on a desk or the like to be operated, the

5

controller is set on a flat surface such as a desk or the like, supported by the projection and the two grips, which makes the operation stable.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a plan view of the controller according to a first embodiment of the present invention.

FIG. 2 is a right side view of the controller according to the first embodiment.

FIG. 3 is a perspective view of the back side of the controller according to the first embodiment as slantly viewed.

FIG. 4 is a perspective view of the controller according to the first embodiment in a state in which the controller is held by an operator.

FIG. 5 is a rear side view of the controller according to the first embodiment of the present invention with an expansion unit is detached from the controller body.

FIG. 6 is detailed views of an expansion connector of the controller body of the controller, and a connector of an expansion unit.

FIG. 7 is a block diagram of the controller according to the first embodiment with an expansion unit which does not add expansion functions connected to.

FIG. 8 is a block diagram of the controller according to the first embodiment with an expansion unit which adds expansion functions connected to.

FIG. 9 is views of pin arrangements of the connectors of an expansion unit and the controller body of the controller according to the first embodiment of the present invention.

FIG. 10 is explanatory views of conversion of command signals from the controller body which is conducted by the expansion unit according to the first embodiment of the present invention.

FIG. 11 is a block diagram of the conventional controller with an expansion unit connected to.

FIG. 12 is a perspective view of an example of the expansion unit for the controller according to the first embodiment of the present invention.

FIG. 13 is a block diagram of an example of the expansion unit for the controller according to the first embodiment of the present invention, which uses infrared ray signals.

FIG. 14 is a block diagram of an example of the expansion unit for the controller according to the first embodiment of the present invention, which includes a photo detector.

FIG. 15 is a block diagram of an example of the expansion unit for the controller according to the first embodiment of the present invention, which includes a vibration unit.

FIG. 16 is a perspective view of an example of the expansion unit for the controller according to the first embodiment of the present invention, which includes a joy stick.

FIG. 17 is a block diagram of an example of the expansion unit of the controller according to the first embodiment of the present invention, including the joy stick.

FIG. 18 is a plan view of another example of the expansion unit including a joy stick for the controller according to the first embodiment of the present invention.

FIG. 19 is a perspective view of said another example of the expansion unit including the joy stick for the controller according to the first embodiment of the present invention.

FIG. 20 is a perspective view of an example of the expansion unit including a track ball for the controller according to the first embodiment of the present invention.

FIG. 21 is a block diagram of the example of the expansion unit including the track ball for the controller according to the first embodiment.

6

FIG. 22 is a plan view of another example of the expansion unit including the track ball for the controller according to the first embodiment of the present invention.

FIG. 23 is a perspective view of said another example of the expansion unit including the track ball for the controller according to the first embodiment of the present invention.

FIG. 24 is a perspective view of said another example of the expansion unit which adds a memory module to the controller according to the first embodiment of the present invention.

FIG. 25 is a block diagram of the example of the expansion unit which adds a memory module to the controller according to the first embodiment of the present invention.

FIG. 26 is a perspective view of an example of the expansion unit including an image display for the controller according to the first embodiment of the present invention.

FIG. 27 is a block diagram of the example of the expansion unit including the image display unit for the controller according to the first embodiment of the present invention.

FIG. 28 is a plan view of an example of the expansion unit including a clock display unit for the controller according to the first embodiment of the present invention.

FIG. 29 is a block diagram of the example of the expansion unit including the time display unit for the controller according to the first embodiment of the present invention.

FIG. 30 is a perspective view of an example of the expansion unit including a handle shaft for the controller according to the first embodiment of the present invention.

FIG. 31 is a block diagram of the example of the expansion unit including the handle shaft for the controller according to the first embodiment of the present invention.

FIG. 32 is a perspective view of the held state of the example of the expansion unit including hand shaft for the controller according to the first embodiment of the present invention.

FIG. 33 is a perspective view of an example of the expansion unit including an inclination detecting unit for the controller according to the first embodiment of the present invention.

FIG. 34 is a block diagram of the example of the expansion unit including the inclination detecting unit for the controller according to the first embodiment of the present invention.

FIG. 35 is a plan view of the controller according to a second embodiment of the present invention.

FIG. 36 is a front view of the controller according to the second embodiment of the present invention.

FIG. 37 is a right side view of the controller according to the second embodiment of the present invention.

FIG. 38 is a perspective view of an example of the expansion unit including an inclination detection unit with a vibration function of the controller according to the second embodiment.

FIG. 39 is a backside view of the controller according to the second embodiment of the present invention with the expansion unit removed from the controller body.

FIG. 40 is a broken perspective view of the example of the expansion unit including an inclination detection unit with the vibration function of the controller according to the second embodiment.

FIG. 41 is a block diagram of the example of the expansion unit including an inclination detection unit with the vibration function of the controller according to the second embodiment.

FIG. 42 is an explanatory view of an operation of the example of the expansion unit including an inclination detection unit with the vibration function of the controller according to the second embodiment.

7

FIG. 43 is a plan view of the controller according to a third embodiment of the present invention.

FIG. 44 is a perspective view of the controller according to the third embodiment of the present invention as viewed slantly from the back.

FIG. 45 is a right side view of the controller according to the third embodiment of the present invention.

FIG. 46 is a bottom view of the controller according to the third embodiment of the present invention.

FIG. 47 is an explanatory view of a mechanism of the direction key of the controller according to the third embodiment of the present invention.

FIG. 48 is an explanatory view of a mechanism of the command lever of the controller according to the third embodiment of the present invention.

FIG. 49 is a perspective view of the controller according to the third embodiment of the present invention, which shows an operational state.

FIG. 50 is a block diagram of a circuit of the controller according to the third embodiment of the present invention, which shows a structure thereof.

BEST MODE FOR CARRYING OUT THE PRESENT INVENTION

A First Embodiment

The controller according to a first embodiment of the present invention will be explained with reference to FIGS. 1 to 34. FIG. 1 is a plan view of the controller according to the present embodiment. FIG. 2 is a right side view of the controller according to the present embodiment. FIG. 3 is a perspective rear side view of the controller according to the present embodiment as slantly viewed. FIG. 4 is a perspective view of the controller according to the present embodiment, which shows a way in which an operator holds the controller. FIG. 5 is a perspective rear side view of the controller according to the present embodiment in a state where the expansion unit is detached from the controller body. FIG. 6 is views of pin arrangements of a connector of the expansion unit and of an expansion socket of the controller body.

(Structure of the Controller)

The controller according to the present embodiment comprises a controller body 10 and an expansion unit 30.

The controller body 10 provides basic functions of the controller. As shown in FIG. 1, a start button 16 and a change-over switch 18 are disposed at a central lower part of an operation side 10a on the front side of the controller body 10, an analog direction key 12 and a digital direction key 14 are disposed on the left side of the operation face 10a, and six command buttons 20x, 20y, 20z, 20a, 20b, 20c are disposed on the right side of the operation face 10a. A command lever 22l is disposed on the central left side of an operation side 10c on the back side of the controller body 10, and a command lever 22r is disposed on the central right side of the operation side 10d. A screw hole 29 for screwing is formed in the center of the back side of the controller body 10.

As described above, the controller according to the present embodiment has the analog direction key 12, the digital direction key 14, the start button 16, the change-over switch 18 and the command buttons 20x, 20y, 20z, 20a, 20b, 20c on the operation side 10a on the front side, and the command levers 22l, 22r respectively on operation sides 10c, 10d on the back side.

The start button 16 is of the type that one command can be inputted with one push. The start button 16, which is disposed at the central lower part of the operation side 10a, is difficult

8

to press frequently, and is mainly used to give commands that are not used during a game, such as the start command.

The change-over switch 18 is provided for ensuring compatibility with conventional controllers. When the change-over switch 18 is slid to the left, the compatible mode which is the same as the conventional controllers is available. In this mode, the analog direction key 12 is invalid while the digital direction key 14, the start button 16, the command buttons 20x, 20y, 20z, 20a, 20b, 20c and the command levers 22l, 22r are valid. Games which are played by the use of the conventional controllers can be played by the use of the innovative controller according to the present embodiment. When the change-over switch 18 is slid to the right, the analog direction key 12 is valid, and games which are played by the use of the innovative controller according to the present embodiment can be played.

The present embodiment includes two direction keys 12, 14. The analog direction key 12 commands all continuous directions over 360°, thus making the so-called analog direction commands. The digital direction key 14 commands 8 separate preset directions, thus making the so-called digital direction commands. Both direction keys 12, 14, which are disposed on the left side of the front operation side 10a, are usually operated with the left hand of a player.

The analog direction key 12 has an operation plate (not shown) which is free to tilt by operations of a player. Based on the tilt direction of the operation plate, a command direction is detected.

The digital direction key 14 has an operation plate (not shown) which is free to tilt by operations of a player. When the operation plate is tilted, switches (not shown) disposed on the upper, lower, left and right sides of the plate are pressed to detect 8 directions including the upper and lower directions, the left and right directions and the intermediate directions therebetween.

The command buttons 20x, 20y, 20z, 20a, 20b, 20c are of the type that one command is inputted by one push of one of the buttons. The buttons 20x, 20y, 20z, 20a, 20b, 20c, which are disposed on the right side of the operation side 10a on the front side, are usually operated with the thumb of the right hand of an operator.

The command levers 22l, 22r are pulled toward the operator to input continuously changing command signals. The command levers 22l, 22r, which are disposed on the operation sides 10c, 10d on the left and right sides of the back side, are operated by pulling them toward the operator with the fingers of both hands except the thumbs, e.g., with the index fingers and the middle fingers when the operator holds the controller with both hands.

The command levers 22l, 22r respectively include operation levers (not shown). The command levers 22l, 22r are operated to thereby swing the operation levers, and can output continuously changing command signals corresponding to swing angles of the operation levers.

As shown in FIG. 3, the expansion unit 30 is mounted on the center of the back side of the controller body 10. The command levers 22l, 22r are disposed on the operation sides 10c, 10d on the left and the right sides of the expansion unit 30.

As shown in FIG. 1, the controller body 10 has a substantially circular shape which is defined by an outer edge about 13 cm in diameter of the operation side 10a. This suitably sized circular edge allows a player to comfortably grip the controller at any position around the outer edge of the operation side 10a. To enable an operator to comfortably operate

9

the controller, it is preferred that the circular shape of the operation side **10a** of the controller body **10** has a diameter of about 9-17 cm.

The outer edge of the operation side **10a** of the controller body **10** defines the substantially circular shape but defines a larger-radius arc on the left side **10b** of the analog direction key **12**. In the present embodiment, the arc has a diameter of about twice the diameter of the circular shape of the operation side **10a**, i.e., an about 26 cm in diameter, and has an arc length of about 8.5 cm. A direction of the arc on the left side **10b** substantially agrees with a specific direction (upward direction in FIG. 1) of the analog direction key **12**. Accordingly when a player holds the controller body **10**, he can know the upward direction of the analog direction key **12** by the touch of his palms, and can play a game without looking at the controller. To enable a player to comfortably operate the controller, it is preferable that the arc of the left side **10b** has a diameter of about 18-34 cm and an arc length of about 6-11 cm.

When a player operates the controller according to the present embodiment, gripping it with the hands, as shown in FIG. 4, the edge of the operation side **10a** of the controller **10** is held with both hands. To enable a player to comfortably hold the controller with both hands, it is preferable that the controller body **10** has an about 2-4 cm-thickness, and the parts of the controller body **10** where the command levers **22l**, **22r** are disposed have an about 4-8 cm-thickness, which is about twice the thickness of the controller body **10**.

When a player grips the controller with both hands, the thumb of the left hand operates the analog direction key **12** or the digital direction key **14** on the front side, and the index or middle finger of the left hand operates the command lever **22l** on the back side, while the thumb of the right hand operates the command buttons **20x**, **20y**, **20z**, **20a**, **20b**, **20c** on the front side, and the index or middle finger of the right hand operates the command lever **22r** on the back side.

When the analog direction key **12** and the digital direction key **14** are operated, as shown in FIG. 4, the left side **10b** is gripped by the left hand with the arcuate portion of the left side **10b** held by the palm of the left hand, whereby direction commands can be made, with a reference direction of the analog direction key **12**, kept in mind.

Especially, since the analog direction key **12** does not respond with click touch, as does the digital direction key **14**, a player will be at a loss as to his operation direction without the left side **10b**. Thus it is very significant to provide the left side **10b** with the curved portion having a large diameter.

As to the digital direction key **14**, although it is possible to know a command direction of the digital direction **14** based on click touch alone, the presence of the flat left side **10b** ensures that a player knows his operation direction without failure.

As shown in FIG. 3, the expansion unit **30** is mounted in the center of the back side of the controller body **10**. The expansion unit **30** is inserted between the controller **10** and the game device **200**, and supplies command signals from the controller body **10** produced by operating the various operation keys on the controller body **10**. The expansion unit **30** is removable from the controller body **10** to be replaced as required.

The controller with the expansion unit **30** mounted on has the central portion of the controller body **10** projected as shown in FIG. 3. Controllers are usually handled roughly. When the controller is dropped or hit against other objects, the command levers **22l**, **22r** are disposed on the operation sides **10c**, **10d** which are hollows by the expansion unit **30** projected from the back side of the controller body **10** to be protected from direct impacts.

10

FIG. 5 shows the controller body **10** with the expansion unit **30** removed therefrom. The expansion unit **30** has a male connector **31** on the end to be connected to the controller body **10**, and the controller body **10** has a female connector **26** for expansion on the rear side of the controller body **10**. The connector **26** for expansion is the end of a circuit substrate (not shown) disposed inside the controller. When the expansion unit **30** is mounted, the male connector **31** is connected to the female connector **26** for expansion of the controller body **10**.

As shown in FIG. 6B, the connector **31** of the expansion unit **30** has the shape of a male connector and includes 10 pins P1-P10. The upper row of the pins includes, from the left, a first pin P1, a third pin P3, a fifth pin P5, a seventh pin P7, and a ninth pin P9, and the lower row of pins includes, from the left, a second pin P2, a fourth pin P4, a sixth pin P6 and tenth pin P10.

The connector **26** for expansion of the controller body **10** has the shape of a female connector as shown in FIG. 6A and includes two rows of pins. The upper row of the pins includes, from the left, a ninth pin P9, a seventh pin P7, a fifth pin P5, and a third pin P3 and a first pin P1, and the lower row of the pins includes, from the left, a tenth pin P10, an eighth pin P8, a sixth pin P6, a fourth pin P4, and a second pin P2.

(Function of the Controller)

Next, the function of the controller according to the present embodiment will be explained with reference to FIGS. 7 and 8. FIG. 7 is a block diagram containing an expansion unit **30** mounted on, having no additional expansion functions, and FIG. 8 is a block diagram containing a expansion unit **40** mounted on, having additional expansion functions.

As shown in FIGS. 7 and 8, the controller body **10** includes a control computer **24** for general control. The control computer **24** detects operation signals from the analog direction key **12**, the digital direction key **14**, the start button **16**, the command buttons **20x**, **20y**, **20z**, **20a**, **20b**, **20c** and the command levers **22l**, **22r**, and outputs the operation signals in accordance with the operation mode selected by the change-over switch **18**. The controller body **10** includes an expansion connector **26** for connecting the expansion unit **30**.

As shown in FIG. 7, the expansion unit **30**, which adds no expansion functions, includes a connector **31** for connecting the expansion unit **30** to the controller body **10**, and a signal line from the connector **31** is connected to a connection cable **32**. A connector **33** to be connected to the connector **202** of the game apparatus body is provided at the end of the connection cable **32**.

The expansion unit **30** is inserted between the controller body **10** and the game apparatus body **200** and outputs command signals as they are received from the controller body **10** to the game apparatus body **200**.

As shown in FIG. 8, the expansion unit **40**, which adds expansion functions, includes the control computer **44** for general control, which is connected to a function expansion unit **45** for realizing functions to be expanded. The expansion unit **40** includes a connector **41** for connecting to the expansion connector **26** of the controller body **10** as does the standard expansion unit **30**, and a connector **43** to be connected to a connector **202** of the game apparatus body **200** is provided on the end of the connection cable **42**.

The expansion unit **40** is inserted between the controller body **10** and the game apparatus body **200**, and the control computer **44** adds command signals expanded by the function expansion unit **45** to command signals from the controller body **10** and outputs them to the game apparatus body **200**.

11

FIG. 9 shows a pin arrangement of the connector 41 of the expansion unit 40, and a pin arrangement of the expansion unit 26 of the controller body 10.

For both connectors 41, 26, the fourth pin P4, the fifth pin P5, and the sixth pin P6 are used mainly as control lines. The fourth pin P4 is used as the control line for select signals (TH) from the expansion unit 40 to the controller body 10, the fifth pin P5 is used as the control line for request signals from the expansion unit 40 to the controller body 10, and the sixth pin P6 is used as the control line for response signals (TL) from the controller body 10 to the expansion unit 40.

The seventh pin P7, the eighth pin P8, the second pin P2, and the third pin P3 are used mainly as data lines. The seventh pin P7 is used as the data line for 3-bit data signals (R), the eighth pin P8 is used as the data line for 2-bit data signals (L), the second pin P2 is used as the data line for 1-bit data signals (D), and the third pin P3 is used as the data line for O-bit data signals (U).

Furthermore, the first pin P1 is used as an electric power source line (VCC), and the third pin P3 is used as a grounding line (GND).

Then, with reference to FIG. 10, conversion of command signals from the controller body by the expansion unit will be explained.

As shown in FIG. 10A, each of the command signals from the controller body 10 include identification codes ID1-ID4, and data DATA following the identification codes ID1-ID4, and an end code END which indicates the end of the command signals.

In the case of FIG. 7 in which the expansion unit 30 having no expansion functions is connected, command signals shown in FIG. 10A are outputted as they are to the game apparatus body 200. The game apparatus body 200 determines the type of the connected controller, based on the identification codes ID1-ID4 and receives the following data signals DATA.

In the case of FIG. 8 in which the expansion unit 40 having expansion functions is connected, the command signals shown in FIG. 10A are outputted by the controller body 10, but the identification codes ID3, ID4 are changed by the control computer 44 of the expansion unit 40 to controller identification codes ID3', ID4', as shown in FIG. 10B, which identify the controller as having expansion functions. The game apparatus 200 determines the type of the connected controller, based on the identification codes ID1-ID4' and receives the data signals DATA.

FIGS. 10C and 10D show examples of the command signal changing process. The controller body 10 outputs identification codes [1114] and data [FFFF] following the identification codes as shown in FIG. 10C, and the control computer 44 changes the identification signals to identification signals [1166] and adds data [88] after the data [FFFF] as shown in FIG. 10D.

The advantages of the expansion unit for the controller according to the present embodiment will be explained in comparison of the block diagram of the controller according to the present embodiment shown in FIGS. 7 and 8 to the block diagram of the conventional controller shown in FIG. 11.

In the conventional controller, as shown in FIG. 11, the connector 28 is disposed on the end of the connection cable 27 of the controller body 10, and the connector 18 is connected to the connector 202 of the game apparatus body 200. The expansion connector 26 is provided independently of the connection cable 27 for connection of the expansion unit 300, and the expansion connector 26 is connected to the control computer 24. The connector 302 of the expansion unit 300 is

12

connected to the expansion connector 26 to connect the expansion unit 300 to the controller body 10.

The expansion unit of the conventional controller is connected to the controller computer 24 and is under the control thereof as described above. To this end it is necessary that the control computer 24 knows in advance details of functions of the expansion unit 300 connected to the expansion connector 26, e.g., identification numbers, etc. indicative of the connected expansion functions. This is because it is necessary that when the expansion unit 300 is connected, a type, etc. of the expansion unit 300 are supplied to the game apparatus body 200 through the connection cable 27. That is, conventionally a connectable type of the expansion unit 300 must be determined when the controller body 10 is designed, and the expansion unit 300 of a type other than the intended type when originally designed can not be connected.

In contrast to the conventional controller arrangement, in the present embodiment, as shown in FIG. 8, the expansion unit 40 is inserted between the controller body 10 and the game apparatus body 200, and the expansion unit 40 processes command signals from the controller body 10 to supply the same to the game apparatus body 200. The control computer 24 of the controller body 10 only supplies its own command signals. This is because the control computer 44 of the expansion unit 40 conducts processing in connection with expansion functions of its own expansion unit 40. Accordingly, new functions which are not intended when the controller body 10 was designed can be optionally added.

Furthermore, the expansion unit for the controller according to the present embodiment is advantageous in comparison to the case where a new controller having new functions is designed and provided. In designing a new controller, basic command keys, such as direction keys, command keys, etc., are necessary for game operation and are absolutely necessary to retain compatibility with the concurrent controller. It is frequent cases that in addition to the basic command keys, such as direction keys and command buttons, etc., command keys for realizing new functions are added. To this end a new controller including the basic command keys must be redesigned, which makes a fast design impossible and adds to the design costs.

In contrast to this, in the present embodiment, the basic command keys are controlled by the controller body 10, so that the expansion unit can be designed in consideration of only new functions. This can reduce design costs and development time.

EXAMPLES OF THE EXPANSION UNIT

Various examples of the expansion unit will be explained with reference to FIGS. 12 to 34.

(Cordless Expansion Unit)

An expansion unit 50 shown in FIGS. 12 and 13 realizes a cordless expansion unit by the use of infrared signals.

The expansion unit 50 which adds the cordless function includes a connector 51 to be connected to the expansion connector 26 of the controller body 10 just as the standard expansion unit 30 is. The expansion unit 50 also includes a control computer 53 for general control, and the control computer 53 has a light emitting unit 52.

The control computer 53 outputs command signals from the controller body 10 as photo signals using the light emitting unit 52. A light detecting unit 204 of a game apparatus body 200 detects the photo signals from the light emitting unit 52 and decodes the photo signals into command signals.

The expansion unit is thus attached, whereby simply the controller is made cordless.

13

(Photo Signal Detecting Expansion Unit)

An expansion unit **60** shown in FIGS. **12** and **14** is for adding the function of detecting photo signals from the outside, e.g., the video monitor (not shown),

The expansion unit **60** which adds the photo signal detecting function includes a connector **61** to be connected to the expansion connector **26** of the controller body **10** just as the standard expansion unit **30** is, and includes on the end of a connection cable **62** a connector **63** to be connected to a connector **202** of a game apparatus body **200**. The expansion unit **60** includes a control computer **64** for the general control, and the control computer **64** includes a photo detector **65**.

Signals detected by the photo detector **65** are added to command signals from the controller body **10** by the control computer **64** and supplied to a game apparatus body **200**.

The photo detector **65** thus detects photo signals from the outside, e.g., video monitor, whereby shooting games in which enemies in monitor screens are shot can be played.

(Vibration Expansion Unit)

An expansion unit **70** shown in FIGS. **11** and **14** adds the function of giving vibrations to the controller body **10**.

The expansion unit **70** which adds the vibration function includes a connector **71** to be connected to the expansion connector **26** of the controller body **10** just as the standard expansion unit **30** is, and a connector **73** to be connected to a connector **202** of a game apparatus body **200** is provided on the end of a connection cable **72**. An electric power source **76** for giving vibrations is disposed in the connection cable **72**. The expansion unit **70** includes a control computer **74** for the general control, and the control computer **74** includes a vibration unit **75** for giving vibrations.

The vibration unit **75** is actuated in response to a command signal from the game apparatus body **200** or the controller body **10** and gives vibrations to the controller body **10**.

Vibrations are thus given to the controller body **10** from the vibration unit **75**, whereby vibrations are given upon shooting, and realistic games can be enjoyed.

(Joy Stick Expansion Unit)

An expansion unit **80** shown in FIGS. **16** and **17** adds a joy stick as a new operation key to the controller body **10**.

In FIG. **16**, the expansion unit **80** which adds the joy stick is attached to the rear side of the controller body **10**. The expansion unit **80** includes a connector **81** to be connected to the expansion connector **26** of the controller body **10** just as the standard expansion unit **30** is, and a connector **83** to be connected to a connector **202** of a game apparatus body **200** is provided on the end of a connection cable **82**. The expansion unit **80** includes a control computer **84** for the general control, and the control computer **84** includes the joy stick **85**.

When a player operates the joy stick, operation signals are added to command signals from the controller body and are supplied to the game apparatus body **200**.

The joy stick **35** is thus used as a new operation key, and operations can be made suitable for games.

In FIGS. **18** and **19**, the expansion unit **80** which adds the joy stick is attached to the left side of the controller body **10**.

The expansion unit **80** is secured to the controller body **10** by means of a screw hole **87** engaged in a screw hole **29** in the back side of the controller body **10**. Command buttons **86a**, **86b** are provided above the joy stick **85** as viewed in FIG. **17**.

When the expansion unit **80** is attached, the joy stick **85** is positioned on the left side of the analog direction key **12** and the digital direction key **14**, which improves the ease of operation.

(Track Ball Expansion Unit)

An expansion unit **80** shown in FIGS. **20** to **23** adds a track ball as a new operation key to the controller body **10**.

14

In FIG. **20**, the expansion unit **80** which adds a track ball is attached to the rear side of the controller body **10**. The expansion unit **80** includes the track ball **88** in place of the joy stick **85**. When a player operates the track ball, operation signals are added to command signals from the controller body **10** and are supplied to a game apparatus body **200**.

The track ball **88** is thus used as a new operation key to make operations suitable for games.

In FIGS. **22** and **23**, the expansion unit **80** which adds a track ball is attached to the front side of the controller body **10**.

The expansion unit **80** is secured to the controller body **10** by means of a screw **87** engaged in a screw hole **29** in the back side of the controller body **10**. A decision button **89a** and a cancel button **89b** are provided above the track ball **88** as viewed in FIG. **22**.

When the expansion unit **80** is thus attached, the track ball **88** is positioned in front of the controller body **10**, which improves the ease of operation.

(Memory Expansion Unit)

An expansion unit **90** shown in FIGS. **24** and **25** adds a memory module **96** to the controller body **10**.

The expansion unit **90** which adds the memory module **96** includes a connector **91** to be connected to the expansion connector **26** of the controller body **10**, and a connector **93** to be connected to a connector **202** of a game apparatus body **200** is provided on the end of a connection cable **92**. The expansion unit **90** includes a control computer **94** for the general control, and the control computer **94** includes a memory slot **95**. The memory module **96** is engaged in the memory slot **95**.

The memory module **96** can be used in various ways. For example, information from the game apparatus body **200** or the controller body **10** may be stored. In addition, information to the game apparatus body **200** or the controller body **10** may also be stored.

The memory is thus added, whereby functions of the game apparatus can be enhanced.

(Display Expansion Unit)

An expansion unit **100** shown in FIGS. **26** and **27** adds an image display unit **105** to the controller body **10**.

The expansion unit **100** which adds the image display unit **105** includes a connector **101** to be connected to the expansion connector **26** of the controller body **10**, and a connector **103** to be connected to a connector **202** of a game apparatus body **200** is provided on the end of a connection cable **102**. The expansion unit **100** includes a control computer **104** for the general control, and the control computer **104** includes the image display unit **105**. As shown in FIG. **26**, the image display unit **105** is positioned so it can be viewed by a player operating the controller body **10**.

The image display unit **105** can be used in various ways. For example, the image display unit **105** may display information from either the game apparatus body **200** or the controller body **10**.

The image display unit **105** is thus added, whereby functions of the game apparatus can be enhanced.

(Clock Expansion Unit)

An expansion unit **110** shown in FIGS. **28** and **29** adds a clock function to the controller body **10**.

The expansion unit **110** for adding the clock function includes a connector **111** to be connected to the expansion connector **26** of the controller body **10** just as the standard expansion unit **30**, and a connector **113** to be connected to the expansion connector **26** of the controller body **10** is provided on the end of a connection cable **112**. The expansion unit **110** includes a control computer **114** for the general control. The

15

control computer 114 includes a clock unit 116 for counting time and outputs a correct current time. The clock unit 116 includes a time display unit 115. The time display unit 115 display a current time, etc. outputted by the clock unit 116. As shown in FIG. 28, the time display unit 115 is positioned so it can be viewed by a player operating the controller body 10.

The clock unit 116 outputs to the game apparatus body 200 a current time, the length of time that the controller has been connected to the game apparatus body 200, the time when a game is started, etc., and can be used for timing event occurrences in a game.

The clock function is thus added, whereby functions of the game apparatus can be enhanced.

(Handle Expansion Unit)

An expansion unit 120 shown in FIGS. 30 to 32 makes use of the circular shape of the controller body 10 to use the controller body 10 as a handle (rotational control).

As shown in FIG. 30, the expansion unit 120 which add the handle function includes a support base 126, and a handle shaft 127 is projected from the support base 126. The handle shaft 127 can be rotated, and the controller body 10 is secured to the handle shaft 127 by means of a screw. As shown in FIG. 31, a rotary angle detector 125 detects the rotation angle of the handle shaft 127 and outputs the angle to a control computer 124. The connector 121 on the handle shaft 127 is connected to the connector 26 of the controller body 10 as shown in FIG. 31. The expansion unit 120 contains the rotary angle detector 125 and the control computer 124 and is connected via connection cable 122 to game apparatus body 200 via connectors 123, 202 as shown in FIG. 31.

As shown in FIG. 32, when a player operates the controller body 10 as a handle, operation signals are added to command signals from the controller body 10 and are supplied to the game apparatus body 200.

The controller body 10 is thus used as a handle to make operations suitable for games.

(Inclination Detection Expansion Unit)

An expansion unit 130 shown in FIGS. 33 and 34 adds the function of detecting the inclination of the controller body 10.

The expansion unit 130 which adds the function of an inclination includes a connector 131 to be connected to the expansion connection of the controller body 10 just as the standard expansion unit 30 is, and a connector 133 to be connected to a connector 202 of a game apparatus body 200 is provided on the end of a connection cable 132. The expansion unit 130 includes a control computer 134 for the general control, and the control computer 134 includes an inclination detecting unit 135. The inclination detecting unit 135 detects an inclination angle of the controller body 10. Detected signals of the inclination detecting unit 135 are added by the control computer 134 to command signals from the controller body 130 and are outputted to the game apparatus body 200.

The detected signal of the inclination detecting unit 135 can be used in various ways. For example, in the game shown in FIG. 33, an airplane is operated, the control is made so that the airplane is tilted by an inclination of the controller body 10.

As described above, according to the present embodiment, expansion units can be attached to the conventional controller, whereby the controller can have optional additional functions. In the present embodiment, the expansion unit is inserted between the game apparatus body and the controller body, and based on expanded functions, command signals form the controller body are changed by the expansion unit, and supplies to the game apparatus body, whereby completely

16

new functions can be optionally added without making changes to the controller body.

A Second Embodiment

The controller according to a second embodiment will be explained with reference to FIGS. 34 to 36. FIG. 35 is plan view of the controller according to the present embodiment. FIG. 36 is a front view of the controller according to the present embodiment. FIG. 37 is a right side view of the controller according to the present embodiment. The same members and members of the same kinds of the present embodiment as those of the first embodiment are represented by the same reference numerals not to repeat or simplify their explanation.

The controller according to the present embodiment is the same as the first embodiment in that the basic shape of the outside edge of a controller body 10 is circular, and includes two lugs 11l, 11r projected toward a player holding the controller body 10.

In the first embodiment, the left side of the controller body 10 is formed in a larger-diameter arcuate portion so that when a player grips the controller body 10, he can know the upward direction of an analog direction key 12 by the touch of the palm. In the present embodiment, because of the lug 11l, the controller body 10 has substantially the same shape on both the left and right sides. A player knows the upward direction of the analog direction key 12 by touching of the lugs 11l, 11r.

When a player holds the lugs 11l, 11r with his hands, he operates: the analog direction key 12 or a digital direction key 14 on the surface of the controller body 10 with the left thumb, the command lever 22l with the left index or middle finger, the command buttons 20x, 20y, 20z, 20b, 20c on the surface of the controller body 10 with the right thumb, and the command lever 22r on the back side with the right index or middle finger.

In the present embodiment, as shown in FIG. 35, conical grooves are formed in the top surface of the analog direction key 12 with no cross pattern. The analog direction key 12 can indicate all directions, and even if a cross pattern is formed, the direction of the cross pattern do not always agree with a direction indicated by the analog direction key 12. The cross pattern may rather puzzle players. This is because the conical grooves alone are formed. The conical grooves act as an anti-slipping means in operating the analog direction key 12.

Thus, according to the present embodiment, the lugs make the controller convenient for a player to grip during operation.

(Inclination Detection Expansion Unit with Vibration Function)

Then, as an example of the expansion unit of the present embodiment, an inclination detection expansion unit with a vibration function will be explained with reference to FIGS. 38 to 42. FIG. 38 is a perspective view of the present expansion unit. FIG. 39 is back side view of the present expansion unit removed from the controller body. FIG. 40 is a broken perspective view of the present expansion unit. FIG. 41 is a block diagram of the present expansion unit. FIG. 42 is views explaining an operation of the present expansion unit.

The inclination detection expansion unit with vibration function 140 adds the function of detecting an inclined state of the controller body 10 and the function of vibrating the controller body 10.

As shown in FIG. 38, as does the standard expansion unit 30, the expansion unit 140 includes a connector 141 to be connected to the expansion connector 26 of the controller body 10, and a connector 143 to be connected to the connector 202 of the game apparatus body 200 is provided on an end of

17

a connection cable **142**. As shown in FIG. **39**, the expansion unit **140** is mounted on the back side of the controller body **10**.

A structure of the inclination detection expansion unit with vibration function will be detailed with reference to FIG. **40**. The expansion unit **140** includes a main circuit substrate **150**. A connector substrate **151** is connected to one end of the main circuit substrate **150**. An acceleration sensor **152** and a micro-computer **153** are mounted on the main circuit substrate **150**. The acceleration sensor **152** can detect a rotation angle (a roll angle and a pitch angle) from an initial position. The main circuit substrate **150** is connected to a vibration motor **154**. A semi-circular eccentric weight **154** is mounted on the rotary shaft of the vibration motor **154**, and when the vibration motor **154** is rotated, vibrations are generated by the eccentric weight **154a**.

The main circuit substrate **150** is secured to the case **155**. The vibration motor **154** is fit in the box **155a** in the case **155**. The connector substrate **151** is secured to a case **156**. The case **155** is covered by a case **157** with the connection cable **142** therebetween.

A function of the inclination detection expansion unit with vibration function **140** will be explained with reference to FIG. **41**. The expansion unit **140** includes a control computer **144** for general control. The control computer **144** includes an inclination detection unit **145** and a vibration unit **146**.

The control computer **144** includes a microcomputer **153** and generally controls the expansion unit **140**. The inclination detection unit **145** includes the acceleration sensor **152** and detects an inclination angle of the controller body **10**. A detection signal of the inclination detection unit **145** is added by the control computer **144** to a command signal from the controller body **140** to be supplied to the game apparatus body **200**. The vibration unit **146** includes a vibration motor **154** and vibrates, based on a vibration command signal from the game apparatus body **200** or the controller body **10** to give vibrations to the controller body **10**. Source electric power of the vibration motor **154** is supplied by the game apparatus body **200**.

Then, the inclination detecting function will be detailed.

By mounting the expansion unit **140** on the controller body **10**, an inclination angle of the controller can be detected. An inclination angle is represented by a rotation angle (a roll angle and a pitch angle) on the controller. A roll angle TX is represented as shown in FIG. **42A**; as viewed at the back of the controller, when a central roll angle TX is **80h**, a rightist roll angle TX is **00h**, and a leftist roll angle TX is FFh. A pitch angle is represented as shown in FIG. **42B**; as viewed side-ways, when a forward pitch angle TY is **80h**, a lowermost pitch angle TY is **00h**, and an uppermost pitch angle TY is FFh.

Accordingly, when the controller is tilted right, a roll angle TX is decreased, and a roll angle TX is increased when the controller is tilted left. When the controller is tilted downward, a pitch angle TY is decreased, and a pitch angle TY is increased when the controller is tilted upward.

An inclination angle of the inclination detection unit **145** is automatically centered in prescribed occasions while the controller is positioned in the central direction (a roll angle TX=**80h**, a pitch angle TY=**80h**). An inclination angle is automatically centered, e.g., when source electric power is supplied to the game apparatus body **200**, the controller is connected to the game apparatus body **200**, source electric power is supplied to the expansion unit **140**, a mode is changed by operation of the change-over switch **18** of the controller body **10**, the expansion unit **140** is connected to the controller body **10**, and a reset signal is supplied from the game apparatus body **200**.

18

An inclination angle has an insensitive range so that the controller does not react to a slight change of the inclination angle, and when an inclination angle changes by ± 12 degrees, the controller judges that no inclination has took place. It is possible that an insensitive range of an inclination angle is changeable in response to a signal from the game apparatus body **200**. Inclination sensitivity can be adjusted in accordance with a game.

It is also possible that a signal indicative an inclination angle of the inclination detection unit **145** is replaced by a command signal from the analog direction key **12** or a digital direction key **14** by changing a mode. This operation can be made by changing an inclination of the controller in place of operating the analog direction key **12** or the digital direction key **14**.

Then, the vibration function will be detailed.

The expansion unit **140** is connected to the controller body **10**, whereby vibrations can be given to the controller. An intensity of the vibrations can be set by a signal from the game apparatus body **200**. The intensity can be adjusted to be, e.g., 8 stages from a vibration intensity =0 (no vibration) to a vibration intensity =1 to 7.

To ensure safety upon the vibration, source electric power of the vibration motor **154** is supplied by the game apparatus body **200**, so that the vibration is stopped by disconnecting the connector **143** of the expansion unit **140** from the game apparatus body **220**. The vibration is forcibly stopped when no signal is outputted from the game apparatus body **200** within a prescribed period of time. Thus a danger that the vibration is not stopped when the game apparatus body **200** is hung up or when the reset switch is pressed can be prevented. The vibration is forcibly stopped when a mode is changed by the change-over switch **18** of the controller body **10**.

The inclination detection expansion unit with vibration function of this example has a wide variety of uses. For example, the inclination detecting function is used, and the controller itself is operated as the handle of a car. It is possible that the vibration function is used to give trivial vibrations when the car is driven on a bad road, and strong vibrations are given when the car collides. It is also possible that the inclination detecting function is used to operate the controller itself as the column of an airplane. The vibration function may be used to give trivial vibrations for landing of the airplane, and strong vibrations may be given when the airplane is shot.

A Third Embodiment

The controller according to a third embodiment of the present invention will be explained with reference to FIGS. **48** to **50**. FIG. **43** is a plan view of the controller according to the present embodiment. FIG. **45** is a right side view of the controller according to the present embodiment. FIG. **46** is a bottom view of the controller according to the present embodiment.

As shown in FIG. **43**, two grips **512l**, **512r** for a player to hold with the hands are extended from a controller body **510** toward the player. A connection cable **514** to be connected to a game apparatus body (not shown) is provided at the center of the side opposite to the grips **512l**, **512r** of the controller body **510**.

A start button **516** is provided at the lower central part of an operational surface **510a** which is the upper surface of the controller body **510**. A direction key **518** for commanding directions is provided on the left side of the operational surface **510a**. Six command buttons **520x**, **520y**, **520z**, **520a**, **520b**, **520c** are provided on the right side of the operational surface **510a**.

19

As shown in FIG. 44, a bulge **510b** is provided at the central backside of the controller body **510**. The bulge **510b** and the two grips **512l**, **512r** enable the controller body **510** to be mounted stable on a flat surface, as of a table or the like. Parts of the backside of the controller body **510**, which are on both sides of the bulge are recessed, and command levers **522l**, **522r** are provided on operational surfaces **510c**, **510d** which are the recessed parts on both sides of the bulge.

Further, on the operational surface **510c** which is the backside of the controller **510** there is provided a change-over switch **524** for switching functions of a cross key **518**.

Thus, the controller according to the present embodiment includes the start button **516**, the direction key **518** and the command buttons **520x**, **520y**, **520z**, **520a**, **520b**, **520c** on the operational surface **510a** which is the upper surface a start button **516**, and includes the command levers **522l**, **522r** and the change-over switch **524** on the operational surfaces **510c**, **510d** which are the backside of the controller.

The start button **516** is a command button of the type that one command can be inputted by once pressing the start button. The start button is disposed at the lower central part of the upper surface, which makes it difficult to frequently press the start button. The start button is used to make commands, such as a start command for starting a game, or others, which do not require pressing the start button during a game.

The direction key **518** of the present embodiment can make direction commands for 8 preset directions which are spaced from each other, the so-called digital direction commands, and also make continuous direction commands which command all the directions over 360°, the so-called analog direction commands. The direction key **518** is disposed on the left side of the operational surface **510a** on the upper surface and is usually operated by the left thumb of a player.

A mechanism of the direction key **518** will be detailed with reference to FIG. 47. The direction key **518** is in the form of a circular operational plate **530** appearing on the operational surface **510a**. On the upper surface of the operational plate **530**, a cross-shaped relief is formed as a mark for facilitating a player knowing an operational direction. The operational plate **530** is connected to a circular plate **534** provided inner of the operational surface **510a**. The circular plate **534** is integrated with the operational plate **530** and is moved following the operational plate **530**.

On the underside of the circular plate **534** there are provided convexities **535** at positions corresponding to four directions, upper and downward, and left and right directions. A base plate **536** is provided below the circular plate **534**, and rubber switches **538** are provided at positions opposed to the convexities **535** on the circular plate **534**.

When a player operates to tilt the operational plate **530** in one direction, the associated convexity **535** presses down the associated rubber switch **538** to short-circuit an electrode pattern (not shown) on the base plate **536** to detect the operational direction. When the operational plate **530** is tilted in one of the upper and downward, and left and right directions, the associated rubber switch **538** is pressed down, whereby the four directions can be detected. When the operational plate **530** is tilted in a direction between the upward and the down directions and the left and the right directions, and their adjacent directions, two rubber switches are pressed down together, and totally 8 directions including the upper and the downward directions and the left and the right directions can be detected.

Secular encoders **540** are provided on the circular plate **534** at the ends of two directions crossing each other. Each encoder **540** has holes **540a** opened at a certain interval along the peripheral edge thereof. As shown in FIG. 47, the secular

20

encoders **540** are moved up and down on a vicinity of the rod **532** corresponding to an inclination of the circular plate **534**. Photo-interrupters **542** are disposed, holding the peripheral edges of the respective encoders **540**.

Each photo-interrupters **542** includes a light emitting device (not shown) and a photo-detecting device (not shown), and detects presence and absence of an object in an optical path between the light emitting device and the photo-detecting device. When the encoder **540** is moved up and down, the associated photo-interrupter **542** detects passing of the holes **540a** to detect vertical positions of the encoder. The encoders **534** are disposed along two directions of the circular plate **534**, which crosses each other. Based on vertical positions of the two encoders **540**, a direction of tilt of the circular plate **543** can be known. Thus an arbitrary direction of the operational plate **530** operated by a player can be detected, and all directions over 360° can be commanded.

As described above, the direction key **518** of the present embodiment can make not only 8 digital direction commands, but also all analog direction commands over 360°. The digital direction command and the analog direction command can be changed over to each other by the change-over switch **524** provided on the backside of the controller body **510**.

The command buttons **520x**, **520y**, **520z**, **520a**, **520b**, **520c** are of the type that one command can be inputted by once pressing them, as is the start button **516**. The command buttons **520x**, **520y**, **520z**, **520a**, **520b**, **520c** are disposed on the right side of the upper surface of the operational surface **510a** and are operated usually by the right thumb of an operator.

The command levers **522l**, **522r** are pulled toward the foreground to input command amounts which are continuously changed. The command levers **522l**, **522r** are disposed on the left and the right operational surfaces **510c**, **510d** of the backside. As shown in FIG. 49, the command levers **522l**, **522r** are pulled toward the foreground by, e.g., the index fingers or the middle fingers when a player holds the controller with the grips **512l**, **512r** with the left and the right hands.

Mechanisms of the command levers **522l**, **522r** will be explained with reference to FIGS. 46 and 48. The mechanisms of the command levers **522l**, **522r** are the same except that they are horizontally symmetrical to each other, and the command lever **522l** shown on the right side in FIG. 46 will be explained. FIG. 48 is explanatory views of component members of the command lever **522l**, which explain their relationships and shows the mechanism of the command lever **522l** as viewed on the right side.

As shown in FIG. 46, the command levers **522l**, **522r** have operational levers **550** which are projected beyond the operational surface **510c**. As shown in FIG. 48B, the operational lever **550** includes a shaft **550b** provided at the root of a secular operational portion **550a**, and the shaft **550b** is bent at a right angle. The operational portion **550a** of the operational lever **550** is pulled toward the foreground and is rotated on the shaft **550b**.

A detection mechanism for detecting an operational angle of the command lever **522l** is disposed in the projected in the bulge **510b** of the controller body **510**. The detection mechanism includes a secular gear, a circular encoder **554** and a photo-interrupter **561l**.

The secular gear **552** has teeth formed in the arcuate periphery, and a shaft **552a** disposed at the center thereof. The shaft **552a** is bent at a right angle and further at a right angle. The secular gear **552** is rotated on the shaft **552a**.

An end of the shaft **552a** of the secular gear **552** abuts upon an end of an end **552b** of the shaft **552a**, and when the operational lever **550** is rotated on the shaft **550b**, the end

550c of the shaft **550b** pushes the end **552b** of the secular gear **552** to rotate the secular gear **550c**.

As shown in FIG. 48A, the circular encoder **554** has holes **554a** formed in the peripheral edge at a certain interval. The circular gear **554b** is formed on the center of the circular encoder **554**. As shown in FIG. 48A, the circular gear **554b** is in mesh with the circular gear **552**, and when the circular gear **552** is rotated, the circular encoder **554** is rotated through the circular gear **554b**.

A photo-interrupter **556l** is disposed, holding the circular encoder **554** therebetween, and passing of the holes **554a** in the circular encoder **554** is detected to detect rotation angles of the circular encoder **554** and rotation angles of the operational lever **550**. The command levers **522l**, **522r** are thus operated to supply continuously changing command amounts corresponding to rotation angles of the operational lever **550**, which cannot be supplied by the command buttons **520x**, **520y**, **520a**, **520b**, **520c**.

When a player operates the controller according to the present embodiment, holding the controller with the hands, as shown in FIG. 49, the left and the right grips **512** of the controller body **510** are held by the left and the right hands. The left hand operates the direction key on the surface with the thumb, and the command lever **522l** on the backside with the thumb and the middle finger. The right hand operates the command buttons **520x**, **520y**, **520z**, **520a**, **520b**, **520c** on the surface with the thumb, and the command lever **522r** on the backside with the index finger or the middle finger. As described above, according to the present embodiment, continuously changing commands can be made, which the conventional controller has found impossible, and commands of arbitrary directions and commands of continuously changing directions can be made. The command levers provided on the backside of the controller allows more complicated command to be made. Furthermore, complicated commands can be relatively easily with the grips stably held.

When the controller according to the present embodiment is placed on a flat surface, such as a desk, with three points of the bulge **510b** and the grips **512l**, **512r** supported on the flat surface, and the controller can be operated in a stable state. When the controller is placed on a flat surface, such as a desk, as shown in FIG. 45, the operational surface **510a**, which is the upper surface of the controller with the direction key **510** and the command buttons **520x-520c** provided on is parallel with the flat surface, such as the desk, which enables a player to easily operate the direction key **518** and the command buttons **520x-520c**.

When the controller is placed on a desk or the like, as shown in FIG. 45, the command levers **522l**, **522r** do not abut on the desk and define a space which allows the controller to be operated with fingers, and the command levers can be easily operated with both hands placed on the grips **512l**, **512r**.

It is often that the controller is roughly handled, and because of the command levers **522l**, **522r** disposed in the operational surfaces **510c**, **510d** which are cavities beside the bulge **510b** on the backside of the controller body **510**, even when the controller is dropped or is hit against another object, the command levers **522l**, **522r** are prevented from direct impact.

Then, a circuit diagram of the controller according to the present embodiment will be explained with reference to the block diagram of FIG. 50.

For the digital direction command by the direction key **514**, an upper contact **538a**, a lower contact **538c**, a left contact and a right contact **538d** are constituted by the rubber switch **538**, and correspond to the upper and the downward directions and

the left and the right directions. Outputs from the respective contacts **538a-538d** are inputted to direction key direction determining means **560**. Based on the outputs, the direction key direction determining means **560** determines a direction of an inclination of the operational plate **530** commanded by the direction key **514**.

On the other hand, for the analog direction command by the direction key **514**, photo-interrupters **542a**, **542b** are disposed in directions of the circular plate **534** crossing each other. The photo-interrupters **542a**, **542b** respectively include counting means **562a**, **562b** for counting numbers of holes **540a** of encoders **540**, which have passed. Based on counted values given by the counting means **562a**, **562b**, direction key inclination direction computing means **564** an inclination direction of an inclination of the circular plate **534** commanded by the direction key **514**. A most inclined direction is a commanded direction.

Outputs of the direction key determining means **560** and the direction key inclination direction computing means **564** are changed over to each other to be inputted to data input/output control unit **570**.

A output of the start button **516** is inputted directly in the data input/output control unit **570**.

The photo-interrupter **556l** of the command lever **522l** and the photo-interrupter **556r** of the command lever **522r** respectively includes counting means **566l**, **566r**, and counts numbers of holes **554a** in circular encoders, which have passed. Based on counted values given by the counting means **556l**, command lever angle computing means **568l** computes a rotation angle of the operational lever **550** commanded by the command lever **522r**.

Computed outputs from the command lever angle computing means **568l**, **568r** are inputted to data input/output control unit **570**.

Outputs of the command buttons **520x**, **520y**, **520z**, **520a**, **520b**, **520c** are inputted directly to the data input/output control unit **570**.

The data input/output control unit **570** receives signals from the above-described component members to select necessary data corresponding to a data request outputted by the game apparatus body **600** and supplies the data to the game apparatus body **600** through the cable **514**.

Source electric power of the entire controller is supplied by the game apparatus body **600** through the cable **514**.

As described above, according to the present embodiment, the command lever is operated to make continuously changing command which has been impossible in the conventional controller. Arbitrary direction commands can be made by detecting an inclination direction of the operational plate. Furthermore, the command levers are disposed on the operational surface, which is the backside of the controller, so that when the controller is held with the hands, the command levers can be operated with the index fingers and middle fingers, and can be easily subtly operated.

The controller according to the present embodiment can realize natural and comfortable operational feelings in games on which the conventional controller has found it difficult. In a racing game, for example, the direction key is used in steering a handle, the command buttons are used in the gear shift operation and the shift lever operation, the left command lever is used in braking, and the right command lever is used in acceleration, whereby subtle operations can be realized with natural feelings.

The present invention is not limited to the above-described embodiments and covers other various modifications.

For example, the expansion units described in the above-described first and second embodiments are examples and may include those embodiments which add other functions.

The direction key of the controller may have a mechanism other than the above-described mechanism of the third embodiment to detect an inclination direction of the direction key. It is also possible to detect an arbitrary angle, based on a direction of an inclination of an operational unit, such as a joy stick.

In the above-described third embodiment, the digital direction command and the analog direction command by the direction key are changed over to each other by the change-over switch, but it is possible that the change-over switch is not provided, and the key direction itself is operated to change over the digital and analog direction command to each other. It is also possible that data of both a digital direction command and an analog direction command are supplied for the game apparatus body to selectively use the data.

The command levers of the controller may have a mechanism other than the above-described mechanism of the controller according to the third embodiment to detect continuously changing command amounts. It is possible to provide command buttons for outputting one command by one operation in place of the command levers provided on the operational surface, which is the backside of the controller body, and when the controller is held with the hands, the controller can be easily operated with the fingers other than the thumbs, which are not used, and can have more command buttons than the conventional controller.

In the above-described embodiments, the present invention is applied to the controller to be used with a game apparatus, but may be applied to controllers as an input means for controlling electronic devices other than game apparatuses.

In the present specification, "continuously" in "continuously changing", "continuous command directions", etc. include not only the so-called continuous analog amounts, but also digital amounts of digital signals converted from analog signals, which strictly are not continuous and discrete, but can be seen as continuous in terms of signal processing.

INDUSTRIAL APPLICABILITY

The present invention is suitable as a controller for supplying various command to an electronic apparatus by operation of the controller by an operator, more specifically as a controller of a game apparatus, for supplying commands corresponding to game contents

The invention claimed is

1. A controller connectable to an electronic device wherein the controller transmits instruction signals to the electronic device in response to a user's operation, said controller comprising:

- an upper face;
- a left grip means disposed at a left part of said controller;
- a right grip means disposed at a right part of said controllers;
- a plurality of button switches disposed on said upper face of said controller; and
- a pair of direction keys disposed on said upper face, one of said pair of direction keys being arranged so as to give signals indicative of preset discrete directions including up, down, left and right, the other of said pair of direction

keys being arranged so as to give signals indicative of arbitrary directions over 360 degrees,

wherein both of said pair of direction keys are disposed at positions of a left part of said upper face so that both of said pair of direction keys may be manipulated by a thumb of the user's left hand which holds said left grip means of the controller and said plurality of button switches are disposed at a right part of said upper face so as to be manipulated by a thumb of the user's right hand which holds said right grip means of the controller when the controller is held by both hands of the user with said left grip means of the controller held by the user's left hand and with said right grip means of the controller held by the user's right hand.

2. A controller connectable to an electronic device wherein the controller transmits instruction signals to the electronic device in response to a user's operation, said controller comprising:

- an upper face;
- a left grip means disposed at a left part of said controller;
- a right grip means disposed at a right part of said controller;
- a plurality of button switches disposed on a right part of said upper face of said controller so as to be manipulated by a thumb of the user's right hand which holds said right grip means of the controller;
- a first direction key arranged so as to give signals indicative of preset discrete directions,
- a second direction key arranged so as to give signals indicative of arbitrary directions over 360 degrees;
- wherein both of said first and second direction keys are disposed at positions of a left part of said upper face so that both of said first and second direction keys are manipulated by a thumb of the user's left hand which holds said left means grip of the controller when the controller is held by both hands of the user with said left grip means of the controller held by the user's left hand and with said right grip means of the controller held by the user's right hand; and
- a signal generating means which generates a first mode of data and a second mode of data, said first mode of data being compatible with data to be generated by conventional controllers, said second mode of data including data indicative of the signals given by the second direction key.

3. The controller of claim 2, wherein both of said first mode of data and said second mode of data are transmitted to the electronic device and at least one of said first and second modes of data is selectively used by the electronic device.

4. An input device connectable to an electronic device which executes a game in response to various instruction data transmitted from the input device, said input device comprising:

- an upper face;
- a left grip means disposed at a left part of said input device;
- a right grip means disposed at a right part of said input device;
- a first direction key which generates signals indicative of preset four or eight directions, and a second direction key which generates signals indicative of arbitrary directions,

wherein both of said first and second direction keys are disposed at positions of a left part of the input device so that both of said first and second direction keys are manipulated by a thumb of the left hand of an operator when the input device is held by both hands of the operator with said left grip means of the input device

25

held by the operator's left hand and with said right grip means of the input device held by the operator's right hand.

5. The input device of claim 4, further comprising a plurality of button switches, each of which gives a one-shot signal in response to one push, said plurality of button switches being disposed at a right part of the input device so as to be manipulated by a thumb of the right hand of the operator, wherein the right hand holds the input device at said right grip means of the input device.

6. An input device connectable to an electronic device which executes a game in response to various instruction data transmitted from the input device, said input device comprising:

an upper face;

a left grip means disposed at a left part of said input device;

a right grip means disposed at a right part of said input device;

a plurality of button switches disposed at a right portion of the input device so as to be manipulated by a thumb of an operator's right hand, which holds said right grip means of the input device;

a first direction key which generates signals indicative of preset four or eight discrete directions; and

a second direction key which generates signals indicative of arbitrary directions,

wherein said first and second direction keys are disposed at positions of left portions of the input device so that both of said first and second direction keys may be manipulated by a thumb of the operator's left hand, which holds said left grip means of the input device when the input device is held by both hands of the operator with said left grip means of the input device held by the operator's left hand and with said right grip means of the input device held by the operator's right hand,

said input device further comprising a signal generating means which generates a first mode of data and a second mode of data, said first mode of data including data generated in response to manipulation of said first direction key, said second mode of data including data generated in response to manipulation of said second direction key,

wherein said electronic device selectively utilizes one of said first and second modes of data transmitted to said electronic device.

7. The controller of claim 1, wherein said left grip means is provided by a left rim portion of the controller or by a left grip member extending from the left part of said controller toward the user holding the controller, and said right grip means is provided by a right rim portion of the controller or by a right grip member extending from the right part of said controller toward the user holding the controller.

8. The controller of claim 2, wherein said left grip means is provided by a left rim portion of the controller or by a left grip member extending from the left part of said controller toward the user holding the controller, and said right grip means is provided by a right rim portion of the controller by a right grip member extending from the right part of said controller toward the user holding the controller.

9. The input device of claim 4, wherein said left grip means is provided by a left rim portion of the input device or by a left grip member extending from the left part of said input device toward the operator holding the input device, and said right grip means is provided by a right rim portion of the input device or by a right grip member extending from the right part of said input device toward the operator holding the input device.

26

10. The input device of claim 6, wherein said left grip means is provided by a left rim portion of the input device or by a left grip member extending from the left part of said input device toward the operator holding the input device, and said right grip means is provided by a right rim portion of the input device or by a right grip member extending from the right part of said input device toward the operator holding the input device.

11. An input device connectable to an electronic device which executes a game in response to various instruction data transmitted from the input device, said input device comprising:

an upper face;

a left grip means disposed at a left part of said input device;

a right grip means disposed at a right part of said input device;

a plurality of button switches disposed at a right part of said upper face within areas which can be reached by the right thumb of an operator who holds the input device at said right grip means; and

a first direction key which generates signals indicative of preset discrete directions, and a second direction key which generates signals indicative of arbitrary directions over 360 degrees, both of said first and second direction keys being disposed at a left part of said upper face within areas which can be reached by the left thumb of the operator who holds the input device at said left grip means so that all of said preset discrete directions of said first direction key and all arbitrary directions over 360degrees of said second direction key are effectively manipulated by the left thumb.

12. The input device of claim 11, wherein said left grip means is provided by a left rim portion of the input device or by a left grip member extending from the left part of said input device toward the operator holding the input device, and said right grip means is provided by a right rim portion of the input device or by a right grip member extending from the right part of said input device toward the operator holding the input device.

13. An electronic device which executes a game in response to various instruction data transmitted from an input device,

said input device comprising:

a manipulation face;

a left grip means disposed at a left part of said input device;

a right grip means disposed at a right part of said input device;

a plurality of button switches disposed at a right part of the manipulation face within areas which can be reached by the right thumb of an operator who holds the input device at said right grip means; and

first direction key which generates signals indicative of preset discrete directions, and a second direction key which generates signals indicative of arbitrary directions over 360degrees, both of said first and second direction keys being disposed at a left part of said upper face within areas which can be reached by the left thumb of the operator who holds the input device at said left grip means so that all of said preset discrete directions of said first direction key and all arbitrary directions over 360 degrees of said second direction key are effectively manipulated by the left thumb;

said electronic device having:

a first game mode with which a game is executable in response to signals generated by operating said plurality of button switches and said first direction key,

27

but incompatible with signals generated by operating said second direction key; and
a second game mode with which a game is executable in response to signals generated by operating said second direction key;

28

wherein said electronic device executes a game under one of said first and second game modes by selectively using signals transmitted from said input device.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,488,254 B2
APPLICATION NO. : 11/151214
DATED : February 10, 2009
INVENTOR(S) : Atsunori Himoto et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title Page

Add the following data:

Item (30) Foreign Application Priority Data

Mar. 5, 1996 (JP) 8/47691

Mar. 26, 1996 (JP) 8/70769

Apr. 24, 1996 (JP) 8/102413

Signed and Sealed this
Twenty-first Day of June, 2011

A handwritten signature in black ink that reads "David J. Kappos". The signature is written in a cursive, flowing style with a large initial "D" and a stylized "K".

David J. Kappos
Director of the United States Patent and Trademark Office